RoHS Compliant 2002/95/EC

Process Capable

REV.	ECN. NO.	APPD.

DIMENSIONS

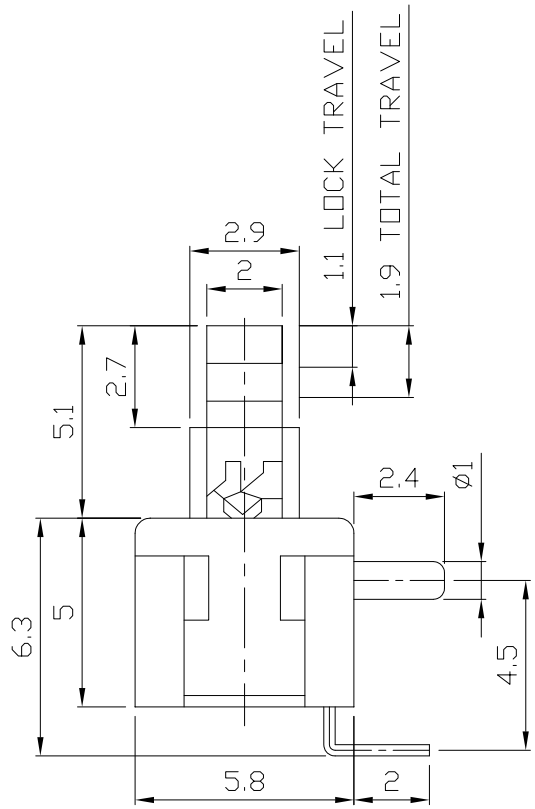

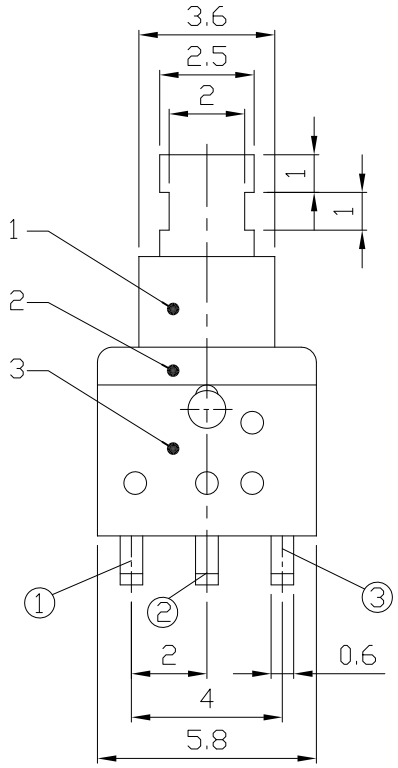



P.C.B LAYOUT

BOTTOM VIEW



CIRCUIT DIAGRAM

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.2A 12V DC	
CIRCUIT	1P2T	
CONTACT RESISTANCE	100mΩ MAX.	
TIMING	NON-SHORTING	
OPERATING MODE	SELF-LOCK	AP-2216HL
	NON-LOCK	AP-2216HN
STROKE	FULL 1.9mm	LOCK 1.1mm
OPERATING FORCE	180±50gf	
OPERATING LIFE(cycles)	10,000	

NO.	PARTS	MATERIAL	Q'TY	FINISHING
9				
8				
7				
6				
5	SPRING	SUS	1	NATURAL
4	CAM STICK	SUS	1	NATURAL
3	CASE	PA66/BRASS STRIP	1	GREY/Ag PLATED
2	COVER	PBT	1	BLACK
1	KNOB	PBT	1	WHITE/Ag CLAD

WITHIN 1.5mm: ±0.1mm

OVER 1.5mm: ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

雅安科技有限公司

ACCURATE INNOTECH INC.

TITLE: PUSH SWITCH / HORIZONTAL

PART NO.: AP-2216HL & AP-2216HN

DR: Ricky 2016/02/19

CHKD: Ricky 2016/02/19

APPD:

DWG NO.: ADL-2216H

SCALE	SHEET	REV.	
5:1	1/1	A	CUSTOMER DRAWING