

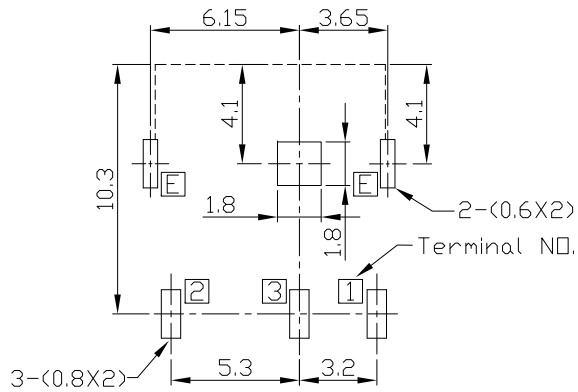
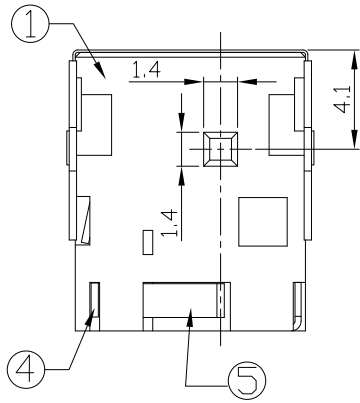


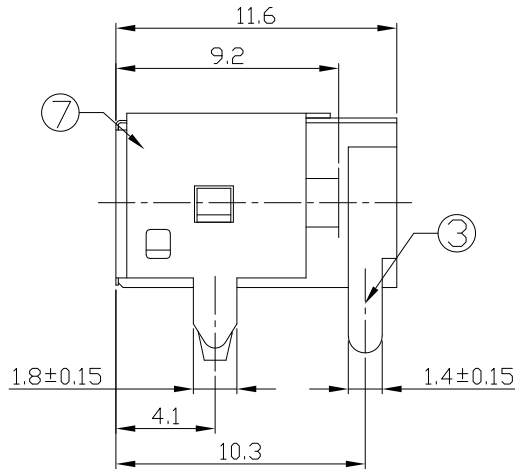

RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.


DIMENSIONS

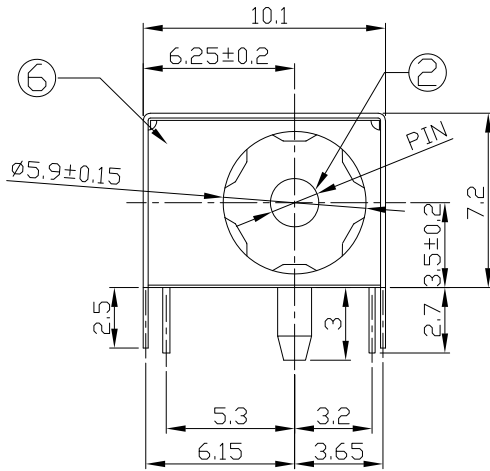

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE:±0.05
(COPPER-SIDED VIEW)



MODEL CODE:

- DCB0-0044Q- A □ 9T BK S 0 4
 (1) (2) (3)(4) (5) (6) (7)(8) (9)
 (1):Series type:DIP DC POWER JACK.
 (2):Series No.
 (3):Schematic option: A , B
 (4):Center pin diameter:
 G=φ1.65 , H=φ2.0 , J=φ2.5
 (5):Material of housing:
 9T=PA9T(Standard) , PB=PBT
 (6):Housing color:
 BK=Black(Only)
 (7):Terminal plating
 S=Silver(Ag)(Standard)
 T=Tin(Sn)
 G=Gold(Au)
 (8):Special option:
 0=No special option
 (9):Packing mode:
 1=Reel packing
 3=Plastic box packing
 4=Bag packing



SPECIFICATION:

- Rating : DC 25V 3A;
- Contact resistance: ≤50mΩ
After test:≤100mΩ
- Insulation resistance: ≥100MΩ (DC500V);
After test:≥50MΩ
- Withstand voltage: 500VAC ;
- Insertion and extraction force: 3-30N;
- life test: 5,000 cycles;
- Operation temperature range:-20°C~70°C;
- Preservative temperature range:-40°C~85°C;



DC MATE PLUG

Model No.	G	H	J
CENTER PIN	φ1.65	φ2.0	φ2.5

○: ITEM NO. □: TERMINAL NO.

NO.	PARTS	MATERIAL	Q'TY	FINISHING	TOLERANCE	ANGLES	UNITS mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
7	Ground shield	Copper Alloy	1	Ni-Plating	±0.3	±2°	MAT'L	TITLE: DIP DC POWER JACK		PART NO.: DCB0-0044Q	
6	Shield plate	Stainless steel	1	Ni-Plating			SEE NOTE	DR: Ricky 2019/04/30		DWG NO.: AB0-0044Q	
5	Shunt Terminal	Copper Alloy	1	Ag-Plating			FINISH	CHKD: Ricky 2019/04/30		SCALE: 1:1 SHEET: 1/1	
4	Tip Spring	Copper Alloy	1	Ag-Plating			SEE NOTE	APPD:		REV. A CUSTOMER DRAWING	
3	Center pin contact	Copper Alloy	1	Ag-Plating			Q'TY				
2	Center pin	Copper Alloy	1	Ni-Plating							
1	Housing	PBT/PA9T	1								

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.