




RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

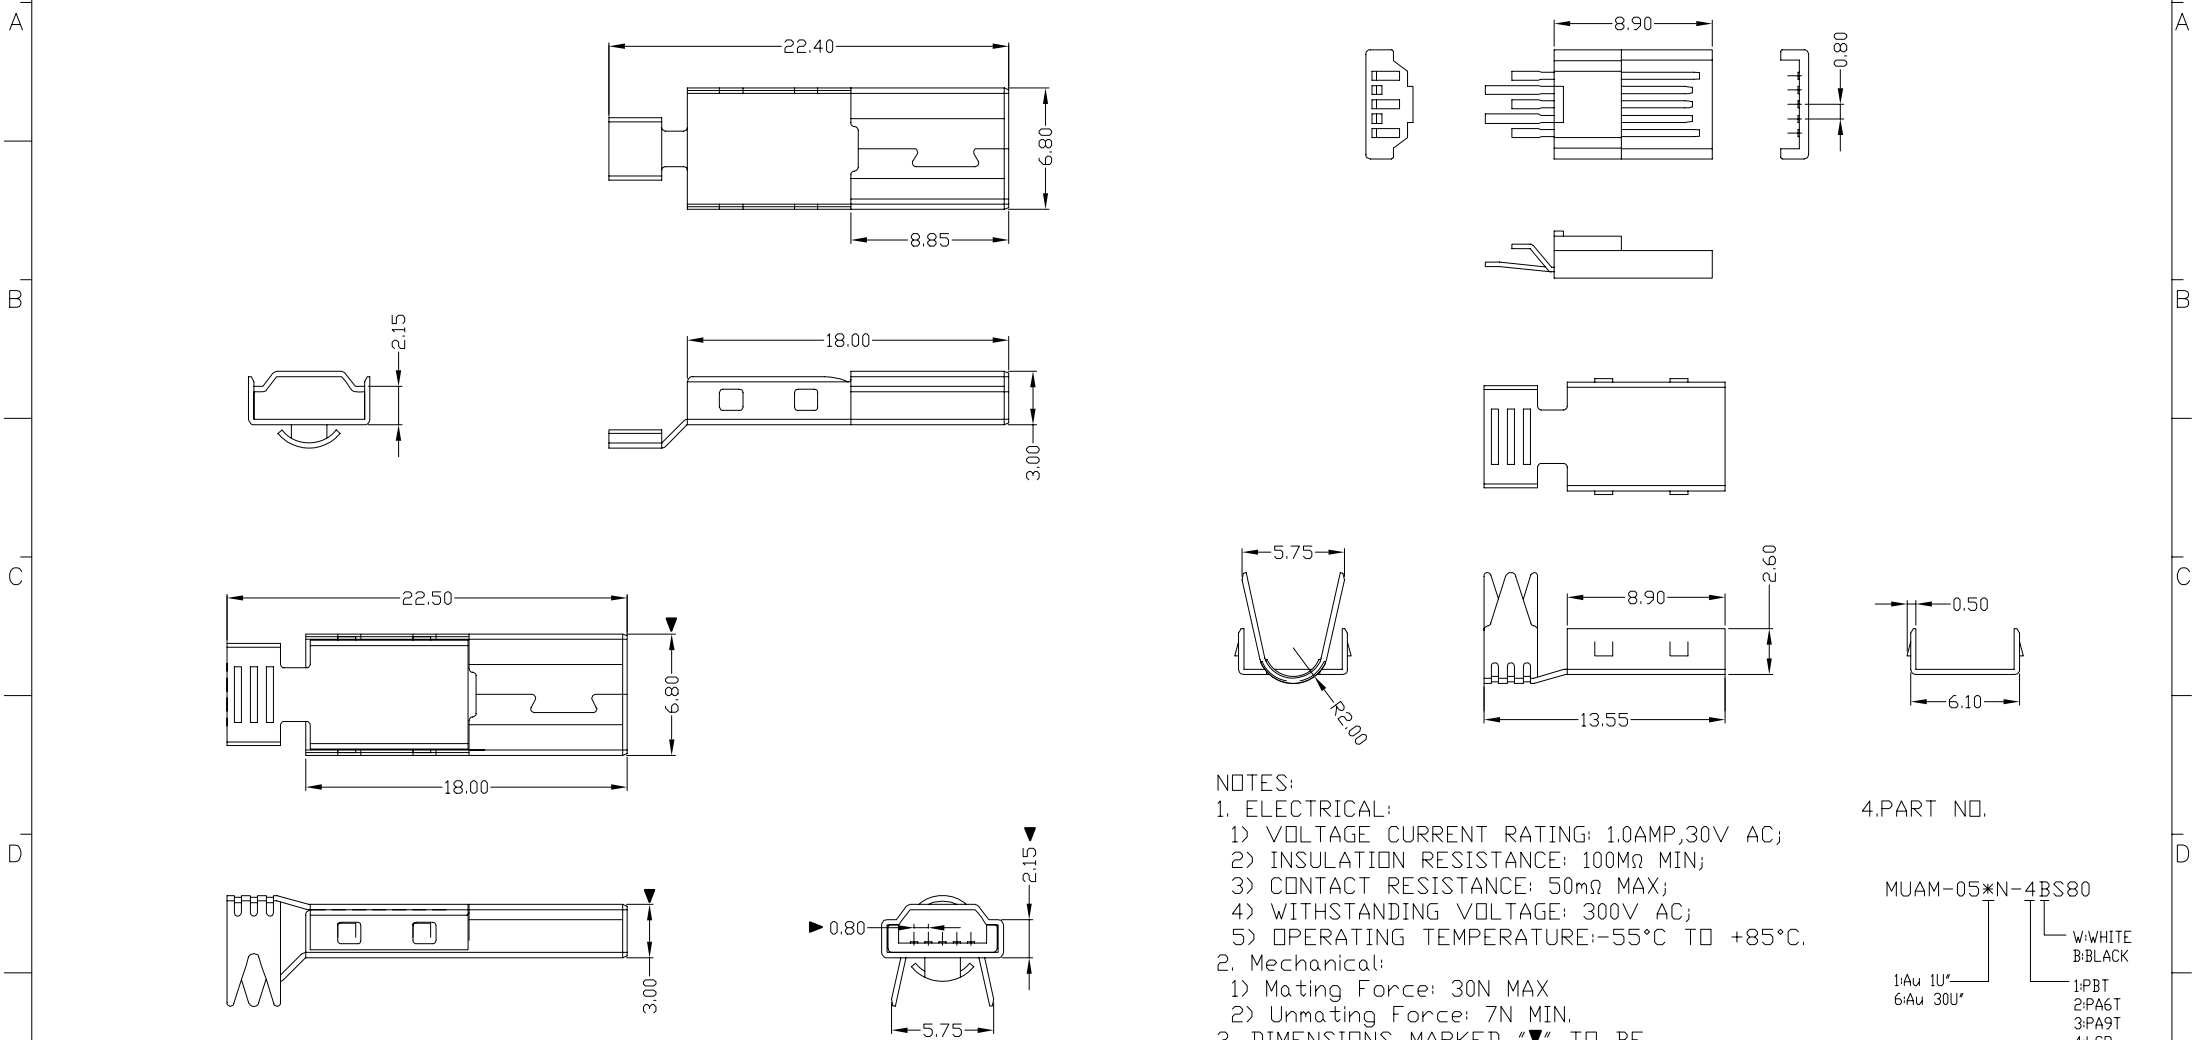

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUAM-05*N-4BS80
 1:Au 1U*
 6:Au 30U*
 W:WHITE
 B:BLACK
 1PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	雅安科技有限公司 ACCURATE INNOTECH INC.					
4	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X* ±1*	mm	TITLE:		PART NO.:			
3	UP SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	MAT'L	MINI USB 5P/M (超薄A型前五后五)		MUAM-05*N-4BS80			
2	DOWN SHELL	SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE	DR: gan 2012/07/03		DWG NO.:			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		FINISH	CHKD: gan 2012/07/03		AII-S80			
							SEE NOTE	APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING
							Q'TY	1:1	1/1	B			