




RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

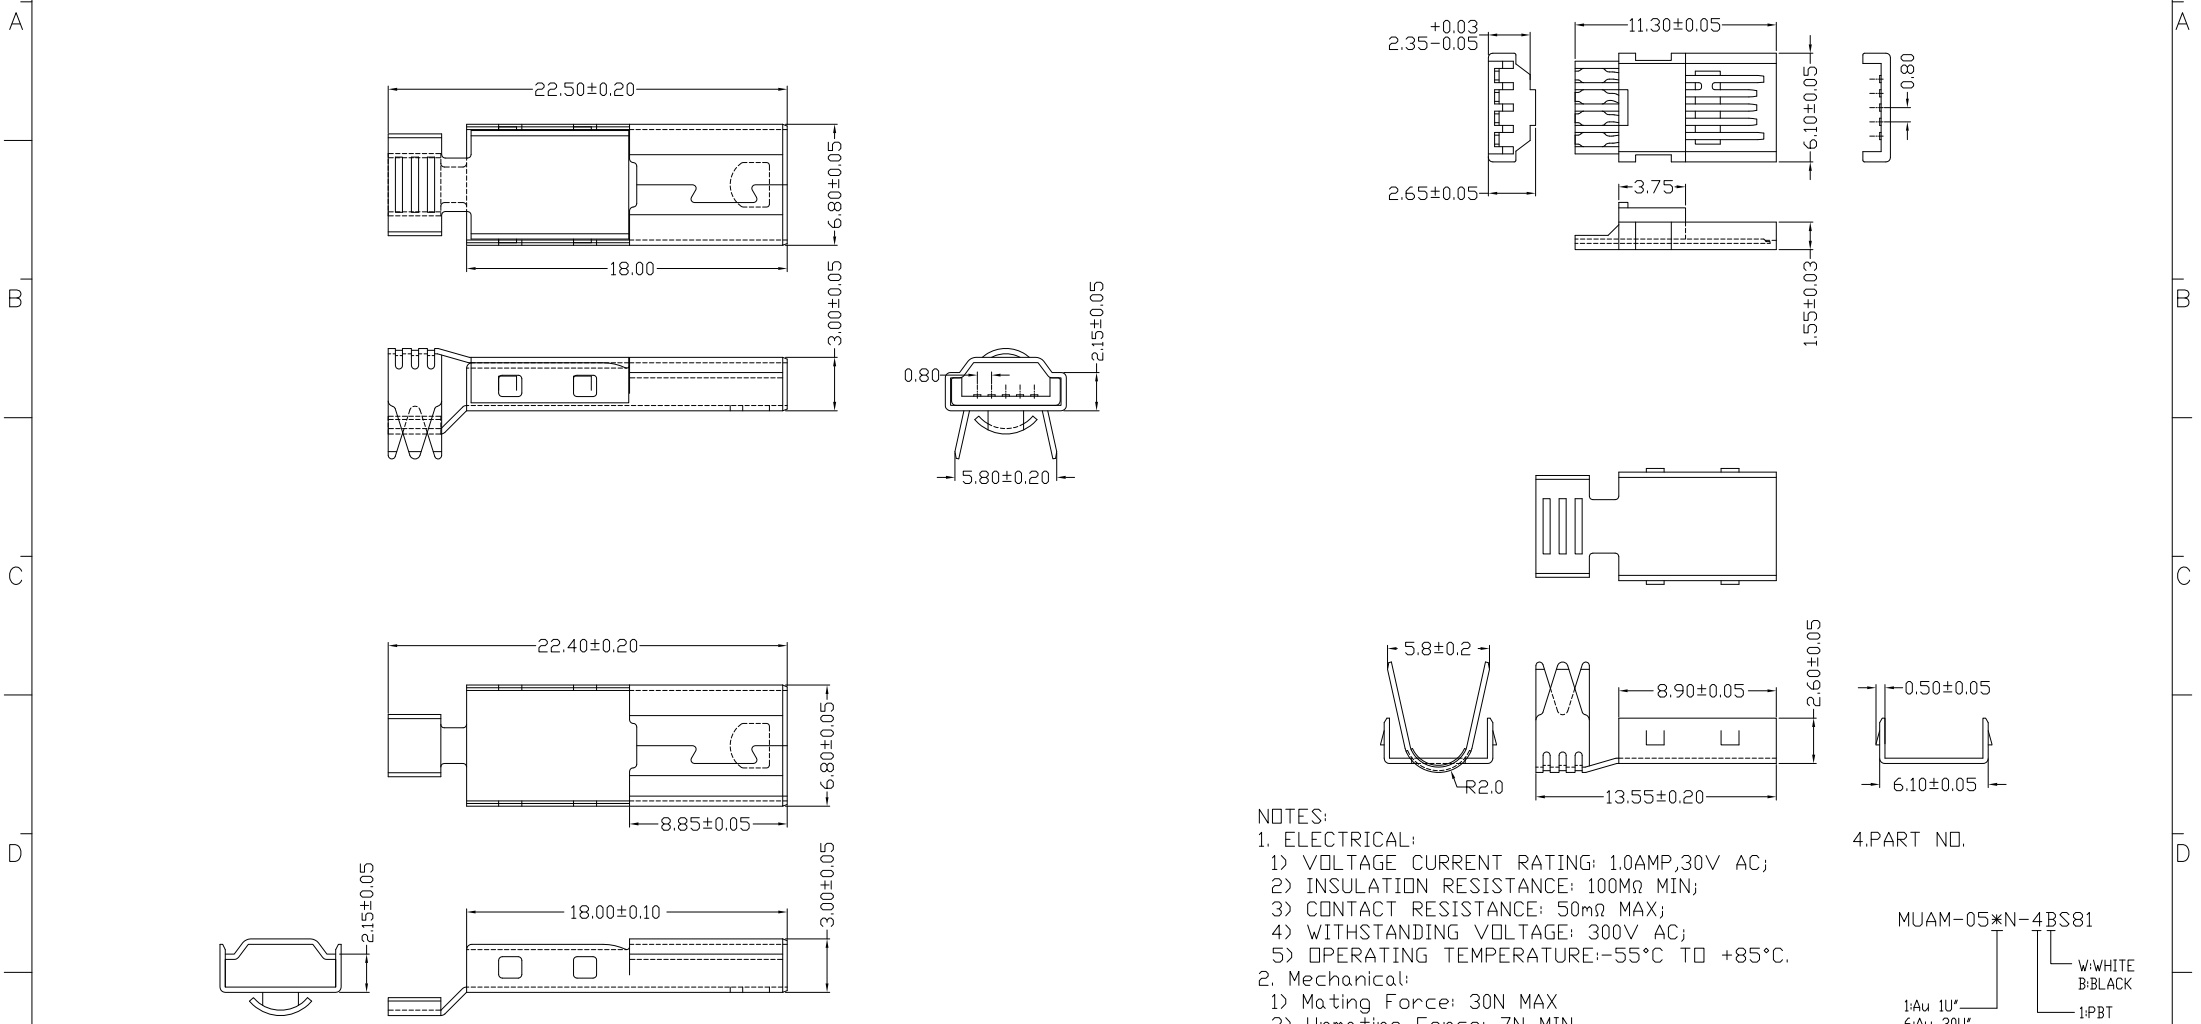

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
    - INSULATION RESISTANCE: 100MΩ MIN;
    - CONTACT RESISTANCE: 50mΩ MAX;
    - WITHSTANDING VOLTAGE: 300V AC;
    - OPERATING TEMPERATURE:-55°C TO +85°C.
  - Mechanical:
    - Mating Force: 30N MAX
    - Unmating Force: 7N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.  
MUAM-05\*N-4BS81

1:Au 1U\*  
6:Au 30U\*

W:WHITE  
B:BLACK  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.' ±2*	UNITS
4	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X' ±1*	mm
3	UP SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	MAT'L
2	DOWN SHELL	SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	SEE NOTE
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN			FINISH
							SEE NOTE
							Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

**雅安科技有限公司**  
**ACCURATE INNOTECH INC.**

TITLE: MINI USB 5P/M 超薄A型前五后四 (4.5连P三件套)  
PART NO.: MUAM-05\*N-4BS81

DR: Ricky 2020/04/20  
DWG NO.: AII-S81

CHKD: Ricky 2020/04/20

APPD:

SCALE	SHEET	REV.	CUSTOMER DRAWING
1:1	1/1	B	