



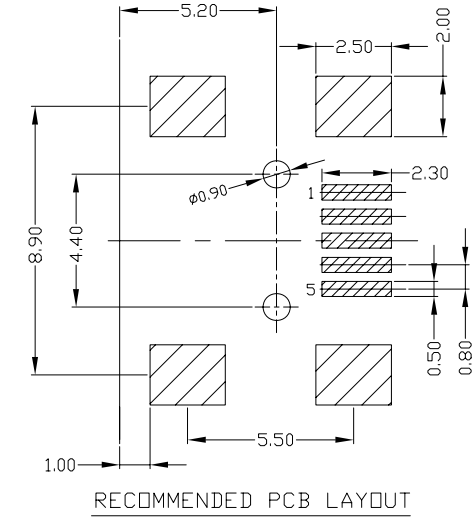


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

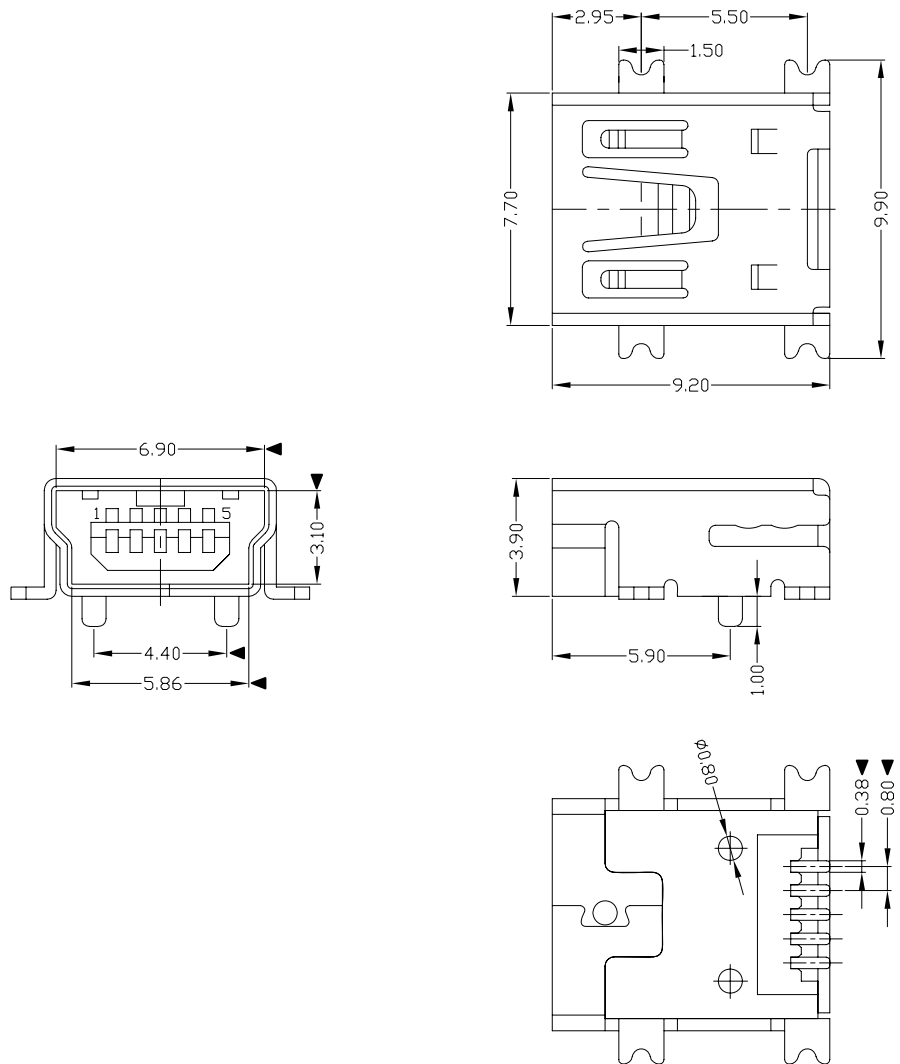

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100M Ω MIN;
 - CONTACT RESISTANCE: 50m Ω MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55 $^{\circ}$ C TO +85 $^{\circ}$ C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.



Bill of materials:

3	HOUSING	LCP	1	UL94V-0
2	SHELL	COPPER ALLOY	1	PLATED NICKEL/TIN
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN
NO	PARTS	MATERIAL	QTY	FINISHING

X. ± 0.35	X.' $\pm 2^*$	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
.X ± 0.3	.X' $\pm 1^*$	MAT'L	SEE NOTE						
.XX ± 0.25	.XX'	FINISH	SEE NOTE	TITLE:	PART NO.:				
.XXX ± 0.15	.XXX'	Q'TY	SEE NOTE	MINI USB 5P/F SMT(B型双卡点1.0柱)	MUBF-05*N-4BH80				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.				DR:	gan 2012/7/02		DWG NO.:		
				CHKD:	gan 2012/7/02		AII-H80		
				APPD:			SCALE	SHEET	REV.
				1:1	1/1	B			