



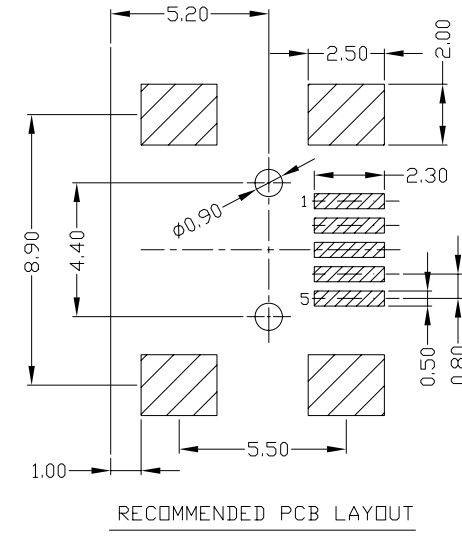

RoHS  
Compliant  
2002/95/EC

REV.	ECN. NO.	APPD.

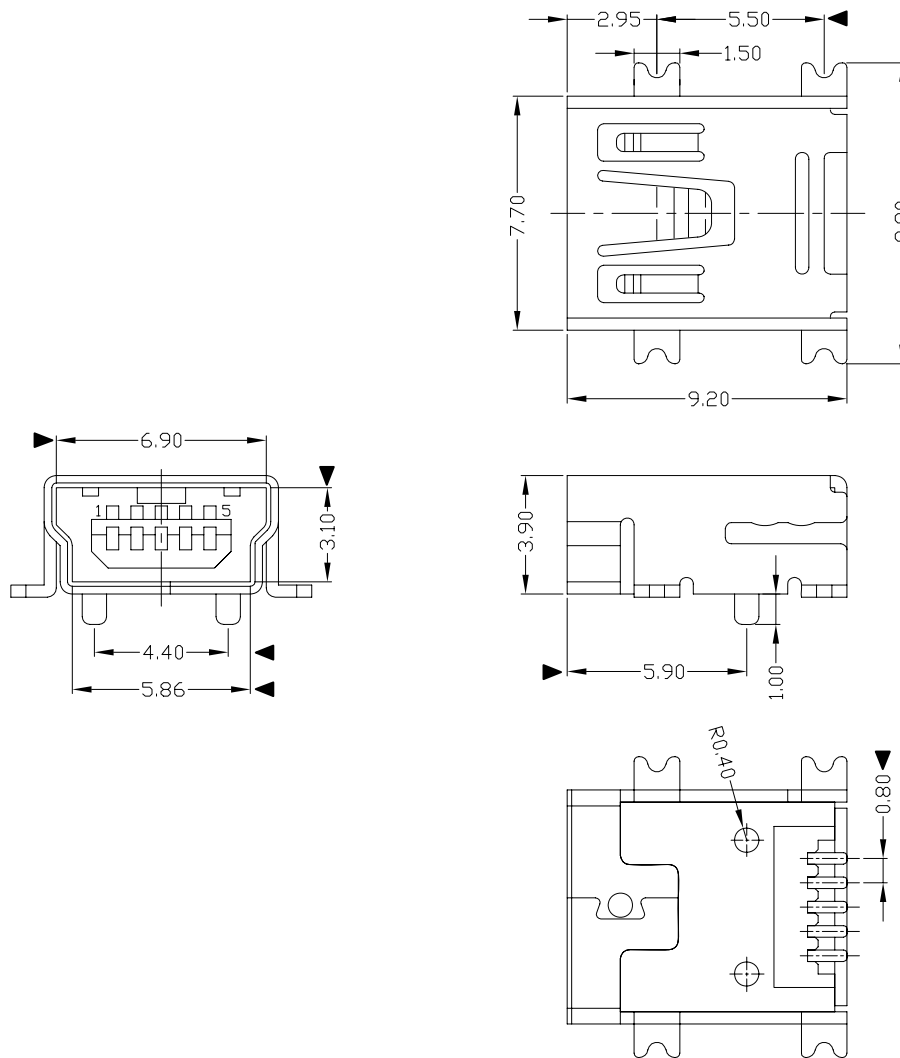

- NOTES:
- ELECTRICAL:
    - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
    - INSULATION RESISTANCE: 100M $\Omega$  MIN;
    - CONTACT RESISTANCE: 50m $\Omega$  MAX;
    - WITHSTANDING VOLTAGE: 300V AC;
    - OPERATING TEMPERATURE:-55°C TO +85°C.
  - Mechanical:
    - Mating Force: 30N MAX
    - Unmating Force: 7N MIN.
  - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.  
MUBF-05\*N-4BH82

1:Au 1U\*  
6:Au 30U\*

W:WHITE  
B:BLACK

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
3	HOUSING	LCP	1	UL94V-0	X. $\pm 0.35$	X.* $\pm 2^*$	MAT'L	TITLE: MINI USB 5P/F SMT(B型1.0柱)		PART NO.: MUBF-05*N-4BH82		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX $\pm 0.25$	.XX*	SEE NOTE	DR: gan 2012/7/02		DWG NO.: AII-H82		
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX $\pm 0.15$	.XXX*	FINISH	CHKD: gan 2012/7/02		SCALE SHEET REV. CUSTOMER DRAWING		
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD:	1:1	1/1	B	