

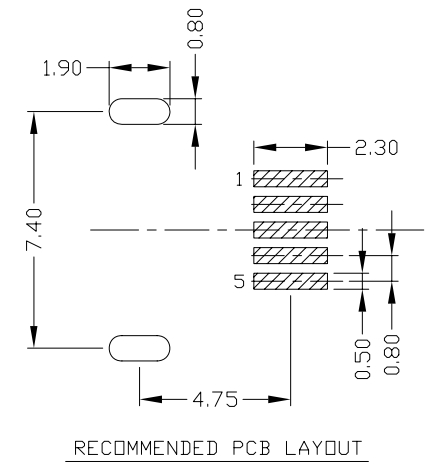




RoHS
Compliant
2002/95/EC

| REV. | ECN. | NO. | APPD. |
|------|------|-----|-------|
| | | | |
| | | | |

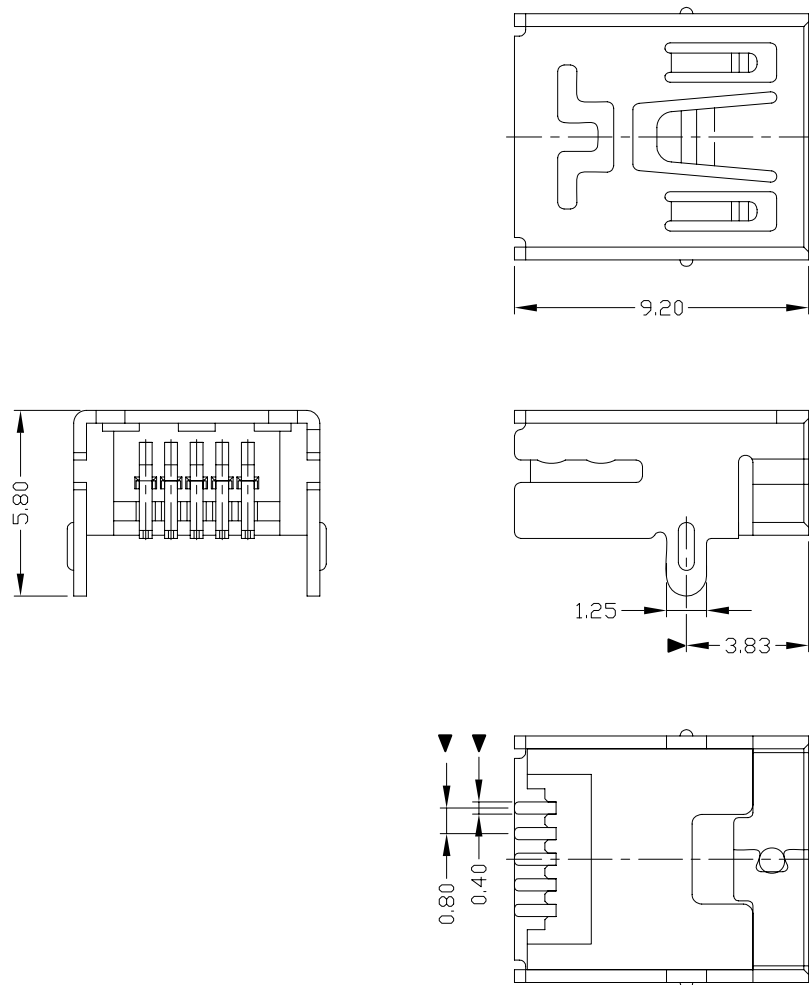

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 10AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.
MUBF-05*N-4BH88

1:W/WHITE
2:B/BLACK

1:PA6T
2:PA6T
3:PA9T
4:LCP

1:1Au 1U*
6:1Au 30U*

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | UNITS | mm | TITLE: | PART NO.: | DR: | CHKD: | APPD: | SCALE | SHEET | REV. | CUSTOMER DRAWING |
|----|----------|--------------|-----|-----------------|---|----------|---------------------------------|-----------------|-----|-----------|-------|-------|-------|------|------------------|
| 3 | HOUSING | LCP | 1 | UL94V-0 | X. ±0.35 | X.* ±2* | MINI USB 5P/F 90° SMT (B型两脚) | MUBF-05*N-4BH88 | gan | 2012/7/02 | gan | 1:1 | 1/1 | B | |
| 2 | SHELL | COPPER ALLOY | 1 | PLATED NICKEL | .X ±0.3 | .X.* ±1* | | | | | | | | | |
| 1 | TERMINAL | COPPER ALLOY | 5 | PLATED GOLD/TIN | .XX ±0.25 | .XX* | | | | | | | | | |
| | | | | | .XXX ±0.15 | .XXX* | | | | | | | | | |
| | | | | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC. | | | | | | | | | | |

雅安科技有限公司
ACCURATE INNOTECH INC.

TITLE: MINI USB 5P/F 90° SMT (B型两脚)
PART NO.: MUBF-05*N-4BH88
DR: gan 2012/7/02
CHKD: gan 2012/7/02
APPD: gan 2012/7/02
SCALE: 1:1
SHEET: 1/1
REV: B
CUSTOMER DRAWING