RoHS Compliant 2002/95/EC

Process Capable

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|---|---|---|---|---|---|
| | | | | | |



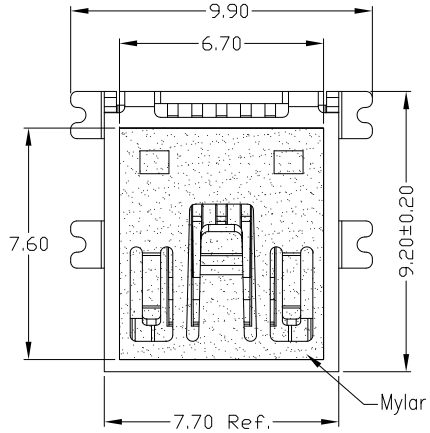


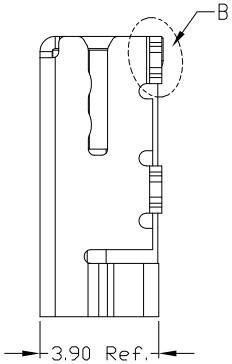


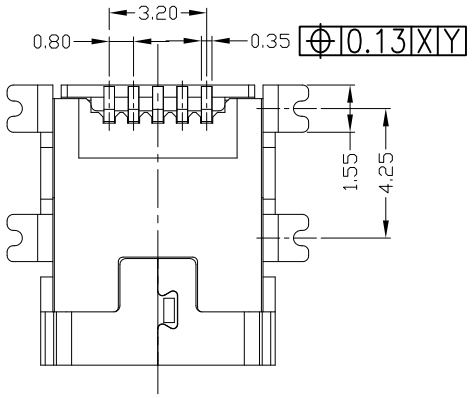


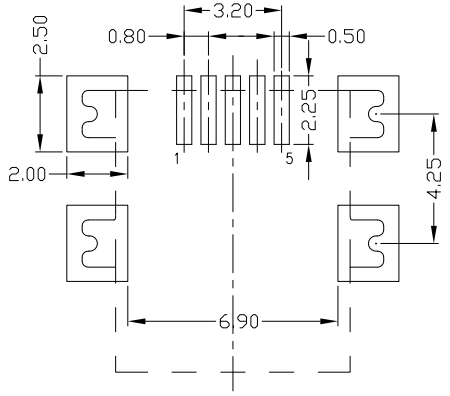


RECOMMENDED P.C.B LAYOUT

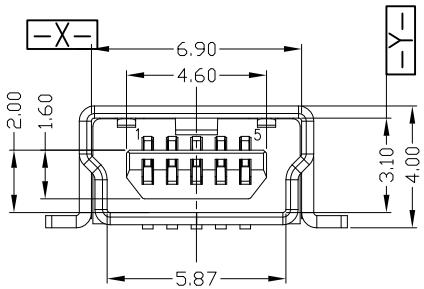





DETAIL B
(2:1)

NOTES:
1. ELECTRICAL:
   1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
   2) INSULATION RESISTANCE: 100MΩ MIN;
   3) CONTACT RESISTANCE: 50mΩ MAX;
   4) WITHSTANDING VOLTAGE: 300V AC;
   5) OPERATING TEMPERATURE: -25°C TO +85°C.
2. Mechanical:
   1) Mating Force: 35N MAX
   2) Unmating Force: 7N MIN.
3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
4. PART NO.

MUBF-05*N-4BHUA637-M
- * : 1:Au 1U" 6:Au 30U"
- N: N:NICKET T:TIN
- 4: W:WHITE B:BLACK
- B: 1:PBT 2:PA6T 3:PA9T 4:LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING |
|---|---|---|---|---|
| 5 | | | | |
| 4 | | | | |
| 3 | SHELL | COPPER ALLOY | 1 | PLATED TIN/NICKEL |
| 2 | HOUSING | LCP+30%GF | 1 | UL94V-0 |
| 1 | TERMINAL | COPPER ALLOY | 5 | PLATED GOLD/TIN |

| | | | |
|---|---|---|---|
| .X ±0.15 | Ang1° | UNITS mm | 雅安科技有限公司 ACCURATE INNOTECH INC. |
| .XX ±0.10 | | MAT'L SEE NOTE | |
| .XXX ±0.05 | | FINISH SEE NOTE | TITLE: MINI USB 5P F SMT B Type 4.25无柱贴麦拉 |
| | | Q'TY | DR: Ricky 2017/10/11 |
| | | | CHKD: Ricky 2017/10/11 |
| | | | APPD: |

PART NO.: MUBF-05XN-4BHUA637-M

DWG NO.: AII-HUA637

| SCALE | SHEET | REV. | CUSTOMER DRAWING |
|---|---|---|---|
| 4:1 | 1/1 | B | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC ,AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC