

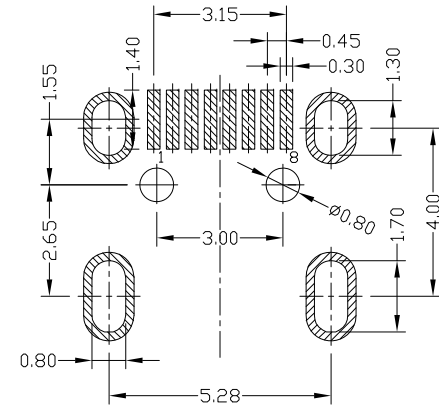
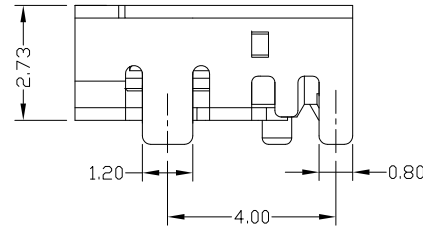
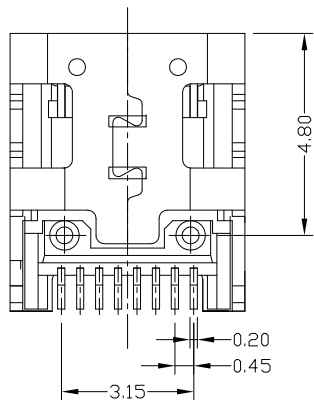




RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

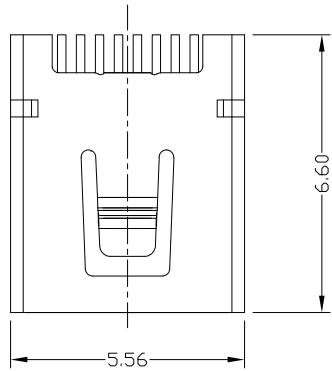

RECOMMENDED PCB LAYOUT

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.0AMP,30V DC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 50mΩ MAX;
  - WITHSTANDING VOLTAGE: 300V AC;
  - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:
  - Mating Force: 30N MAX
  - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBF-08\*N-4BV83

1:Au 1U\*

6:Au 30U\*

N:NICKEL

G:GOLD

W:WHITE

B:BLACK

1:PB

2:PA6T

3:PA9T

4:LCP

Bill of materials:

3	HOUSING	LCP+30%GF	1	UL94V-0	X. ±0.35	X.* ±2°	UNITS	mm
2	SHELL	COPPER ALLOY	1	PLATED NICKEL/GOLD	.X ±0.3	.X.* ±1°	MAT'L	SEE NOTE
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XXX ±0.15	.XXX.*	FINISH	SEE NOTE
NO	PARTS	MATERIAL	QTY	FINISHING	<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</small>			

<b>雅安科技有限公司</b> <b>ACCURATE INNOTECH INC.</b>			
TITLE:		PART NO.:	
<small>MINI USB 8P F 90° DIP四脚3.3mm(横顶单边倒角)</small>		MUBF-08*N-4BV83	
DR:		DWG NO.:	
gan 2017/05/03		AII-V83	
CHKD:		SCALE	
gan 2017/05/03		1:1	
APPD:		SHEET	
		1/1	
		REV.	
		B	
		CUSTOMER DRAWING	