

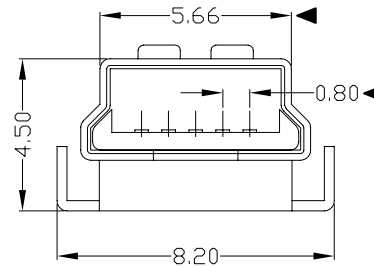


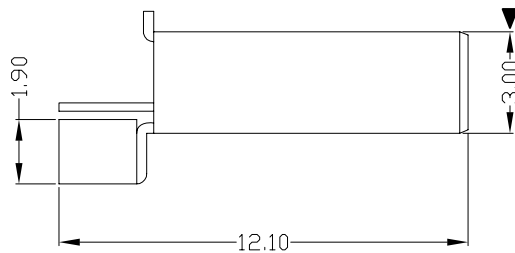

RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

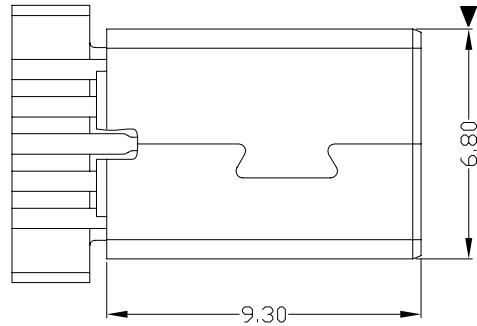

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 50mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
- 4.PART NO.

MUBM-05\*N-4BS801

1: Au 1U"  
6: Au 30U"

W: WHITE  
B: BLACK

1: PBT  
2: PA6T  
3: PA9T  
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	MAT'L	FINISH	Q'TY	APPD	SCALE	SHEET	REV.	CUSTOMER DRAWING	
3	HOUSING	LCP	1	UL94V-0	X. ±0.35	X.' ±2°	SEE NOTE			1:1	1/1	B		
2	SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1°	SEE NOTE							
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.25	.XX'	SEE NOTE							
					.XXX ±0.15	.XXX'								
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.									

雅安科技有限公司  
ACCURATE INNOTECH INC.

TITLE:  
MINI USB 5P/M 短体前五后五  
(B型无孔)  
DR: gan 2012/07/03  
CHKD: gan 2012/07/03

PART NO.:  
MUBM-05\*N-4BS801  
DWG NO.:  
AII-S801

