

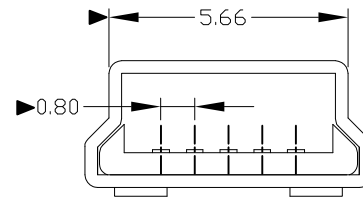


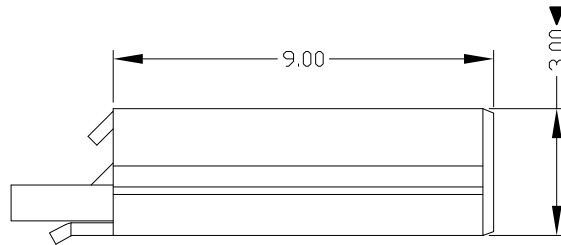

RoHS
Compliant
2002/95/EC

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
| | | | | | |

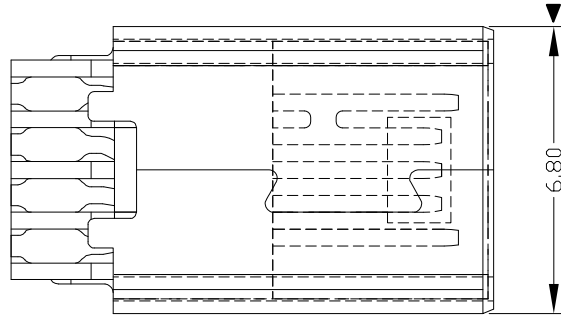

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 50mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 300V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 30N MAX
- 2) Unmating Force: 7N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBM-05*N-4BS804

1:Au 1U*
6:Au 30U*
W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | UNITS | mm | 雅安科技有限公司 ACCURATE INNOTECH INC. | | | | | |
|----|----------|--------------|-----|-----------------|---|---------|------------------------------------|--|------------------------|-------------------------------|----------------------|-------|
| 3 | HOUSING | LCP | 1 | UL94V-0 | X. ±0.35 | X.* ±2* | SEE NOTE | TITLE: MINI USB 5PM 超薄前五后四 短体B型4,5速PIN短路 | | PART NO.: MUBM-05*N-4BS804 | | |
| 2 | SHELL | SPCC | 1 | PLATED NICKEL | .X ±0.3 | .X* ±1* | | SEE NOTE | DR: Ricky 2014/04/23 | | DWG NO.: AII-S804 | |
| 1 | TERMINAL | COPPER ALLOY | 5 | PLATED GOLD/TIN | .XXX ±0.15 | .XXX* | | | CHKD: Ricky 2014/04/23 | SCALE | | SHEET |
| | | | | | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC. | Q'TY | APPD: | 1:1 | 1/1 | B | DRAWING | |