



RoHS Compliant
 2002/95/EC
 Process Capable

| REV | LTR | DESCRIPTION | DATE | REVISER | APPD |
|-----|-----|-------------|------|---------|------|
| | | | | | |

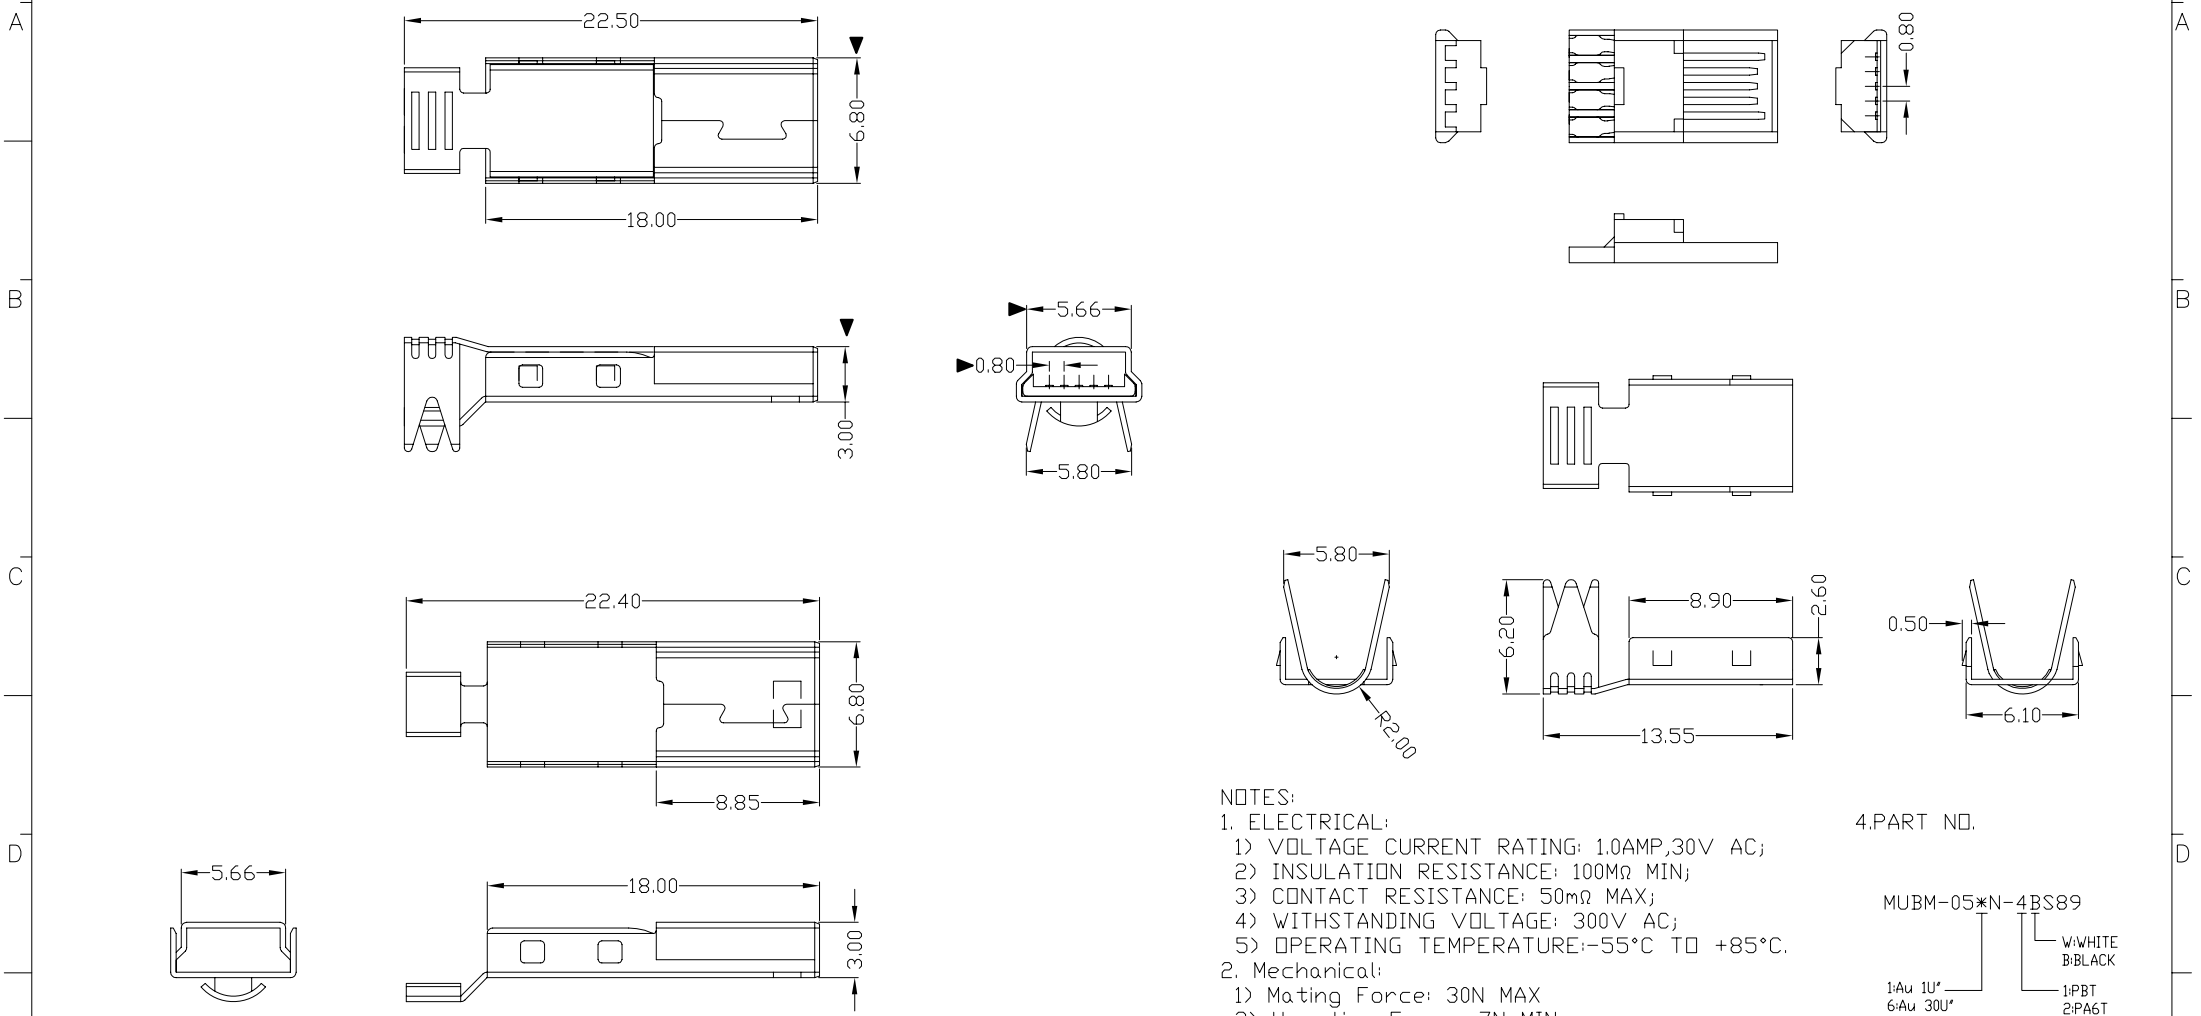

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
 - Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
 - DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUBM-05*N-4BS89

W-WHITE
 B-BLACK
 1-Au 1U*
 6-Au 30U*
 1-PBT
 2-PA6T
 3-PA9T
 4-LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING | | | | | | | | | | | |
|----|------------|--------------|-----|-----------------|---|----------|--------|----------|--|--|--|--|--|--|--|
| 4 | HOUSING | LCP | 1 | UL94V-0 | X. ±0.35 | X.* ±2* | UNITS | mm | 雅安科技有限公司 ACCURATE INNOTECH INC. TITLE: MINI USB 5P/M超薄B型前五后四 (焊线式 三件套) PART NO.: MUBM-05*N-4BS89 DR: gan 2012/07/03 DWG NO.: AII-S89 CHKD: gan 2012/07/03 APPD: | | | | | | |
| 3 | UP SHELL | SPCC | 1 | PLATED NICKEL | .X ±0.3 | .X.* ±1* | MAT'L | SEE NOTE | | | | | | | |
| 2 | DOWN SHELL | SPCC | 1 | PLATED NICKEL | .XX ±0.25 | .XX* | FINISH | SEE NOTE | | | | | | | |
| 1 | TERMINAL | COPPER ALLOY | 5 | PLATED GOLD/TIN | .XXX ±0.15 | .XXX* | Q'TY | SEE NOTE | | | | | | | |
| NO | PARTS | MATERIAL | QTY | FINISHING | THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC. | | | | | | | | | | |

SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING