



RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD






A

B


C

D

E

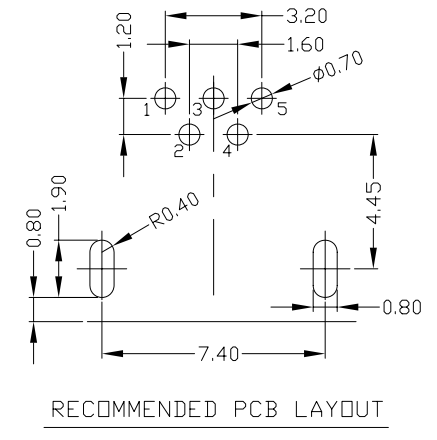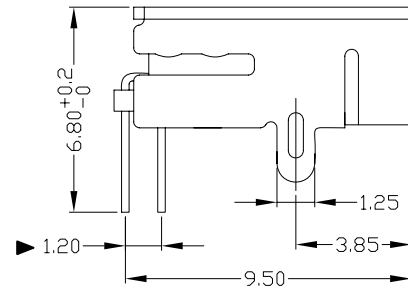

端子正位度以不影响插板为主，所有尺寸只做辅助管控作用，端子高低不平按 MAX 0.30管控



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-55°C TO +85°C.
- Mechanical:
 - Mating Force: 30N MAX
 - Unmating Force: 7N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUNF-05*N-4BR83

W:WHITE
B:BLACK
1:Au 1U"
6:Au 30U"
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.' ±2'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
3	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L		TITLE: MINI USB 5P/F90° AB型两脚 (端子脚加长) PART NO.: MUNF-05*N-4BR83				
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE						DR: gan 2015/1/21
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH		DWG NO.: AII-R83				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY		CHKD: gan 2015/1/21			
								APPD:		SCALE	SHEET	REV.	CUSTOMER DRAWING

1

2

3

4

5

6

7

1:1

1/1

B

DRAWING