




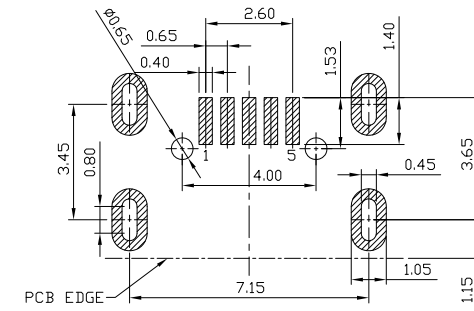

RoHS
Compliant
2002/95/EC


REV.	ECN. NO.	APPD.

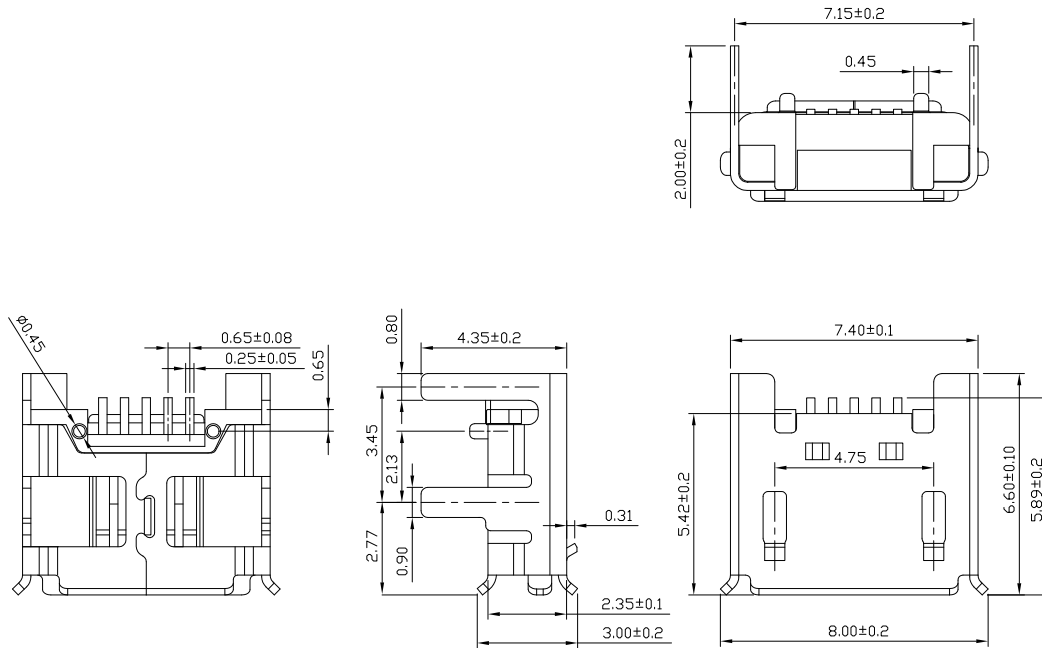

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 1.0AMP,30V DC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
 - OPERATING TEMPERATURE:-30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
3	SHELL	COPPER ALLOY	1	PLATED TIN OR NICKET
2	HOUSING	LCP+30%GF	1	UL94V-0
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD

TOLERANCES		UNITS	MAT'L
.X	±0.30	X.*	
.XX	±0.25	.X.*	SEE NOTE
.XXX	±0.15		SEE NOTE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC			
Q'TY	SEE NOTE		

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE: MICRO USB B TYPE 5P F DIP 有柱 四脚2.0双卡点 端子加长0.55mm		PART NO.: MUYF-05XN-4BH811	
DR: Ricky 2020/05/05		DWG NO.: AII-H811	
CHKD: Ricky 2020/05/05		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	