

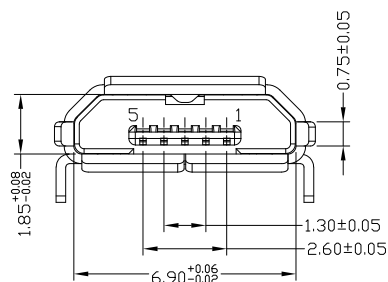
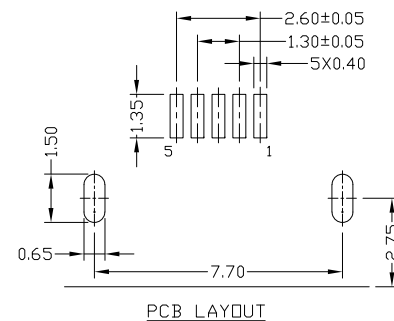






RoHS Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



NOTES:

1.ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP MAX. ,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN.
- 3) CONTACT RESISTANCE: 30mΩ MAX.
- 4) WITHSTANDING VOLTAGE: 100V AC MIN FOR 1 MIN.
- 5) OPERATING TEMPERATURE: -30°C TO +80°C.


2.MECHANICAL:

- 1) MATING FORCE: 35N MAX
- 2) UNMATING FORCE: 10N MIN. INITIAL 8~20N AFTER

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-051N-4BHG3039



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.							
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X.	±0.50	X'	±1*	MAT'L	TITLE:	PART NO.:			
2	HOUSING	LCP+30%GF	1	UL94V-0	.X	±0.20			SEE NOTE	MICRO USB B TYPE F 5P 反向	MUYF-051N-4BHG3039			
1	TERMINAL	COPPER ALLOY	5	PLATED NICKEL/GOLD	.XX	±0.10			FINISH	两脚DIP7.7 脚长1.2 无柱	DWG NO.:			
					.XXX	±0.03			SEE NOTE	DR: Ricky 2023/2/3	AII-HG3039			
									Q'TY	CHKD: Ricky 2023/2/3	SCALE SHEET REV. CUSTOMER			
										APPD:	1:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

