

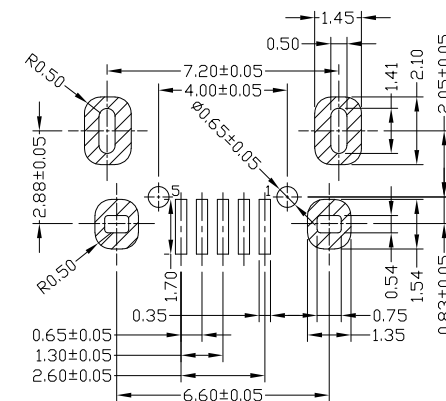







RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.



RECOMMENDED PCB LAYOUT



NOTES:

1.ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 1.0AMP MAX. ,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN.
- 3) CONTACT RESISTANCE: 30mΩ MAX. INITIAL; 40mΩ MAX.
- 4) WITHSTANDING VOLTAGE: 100V AC MIN FOR 1 MIN.
- 5) OPERATING TEMPERATURE: -30°C TO +80°C.

2.MECHANICAL:

- 1) MATING FORCE: 35N MAX
- 2) UNMATING FORCE: 10N MIN. INITIAL 8~20N AFTER

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-051N-4BHG3097

1: Au 1U* W: WHITE
6: Au 30U* B: BLACK
1: PBT
2: PA6T
3: PA9T
4: LCP
T: TIN
N: NICKEL

Bill of materials:

E	3	SHELL	STAINLESS STEEL	1	PLATED NICKEL	X. ±0.50 X'. ±1*	UNITS mm	<p>雅安科技有限公司 ACCURATE INNOTECH INC.</p> <p>TITLE: MICRO USB B TYPE F 5P 牛角外 2.0 7.2 6.6 无边 有柱 加长0.7</p> <p>PART NO.: MUYF-051N-4BHG3097</p> <p>DR: Ricky 2023/2/10</p> <p>DWG NO.: AII-HG3097</p> <p>CHKD: Ricky 2023/2/10</p> <p>APPD:</p>
		2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.20	
	1	TERMINAL	COPPER ALLOY	5	PLATED NICKEL/GOLD	.XX ±0.10	FINISH SEE NOTE	
						.XXX ±0.03	Q'TY	
							<p>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC</p>	
	NO	PARTS	MATERIAL	QTY	FINISHING			SCALE SHEET REV. CUSTOMER DRAWING 1:1 1/1 A