

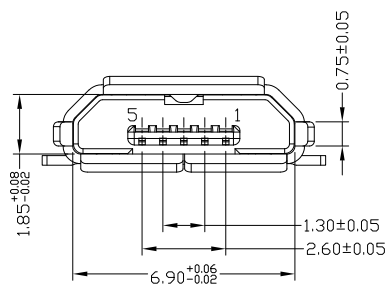
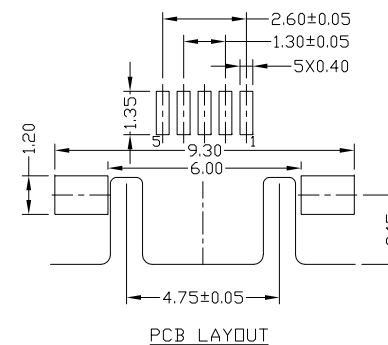






**RoHS Compliant**  
2002/95/EC

REV. ECN. NO. APPD.



**NOTES:**

**1.ELECTRICAL:**

- 1) VOLTAGE CURRENT RATING: 1.0AMP MAX. ,30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN.
- 3) CONTACT RESISTANCE: 30mΩ MAX.
- 4) WITHSTANDING VOLTAGE: 100V AC MIN FOR 1 MIN.
- 5) OPERATING TEMPERATURE: -30°C TO +80°C.

**2.MECHANICAL:**

- 1) MATING FORCE: 35N MAX
- 2) UNMATING FORCE: 10N MIN. INITIAL 8~20N AFTER

**3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.**

**4.PART NO.**

MUYF-051T-4BHG3044

1:Au 1U\*  
6:Au 30U\*  
T:TIN  
N:NICKEL

W:WHITE  
B:BLACK  
1:PBT  
2:PA6T  
3:PA9T  
4:LCP

**Bill of materials:**

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.								
3	SHELL	STAINLESS STEEL	1	PLATED TIN	X.	±0.50	X'	±1*	MAT'L	TITLE:	PART NO.:				
2	HOUSING	LCP+30%.GF	1	UL94V-0	.X	±0.20			SEE NOTE	MICRO USB B TYPE F 5P 反向 两脚SMT 无柱	MUYF-05XT-4BHG3044				
1	TERMINAL	COPPER ALLOY	5	PLATED NICKEL/GOLD	.XX	±0.10			FINISH	DR: Ricky 2023/2/3	DWG NO.:				
					.XXX	±0.03			SEE NOTE	CHKD: Ricky 2023/2/3	AII-HG3044	SCALE	SHEET	REV.	CUSTOMER
									Q'TY	APPD:		1:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

