

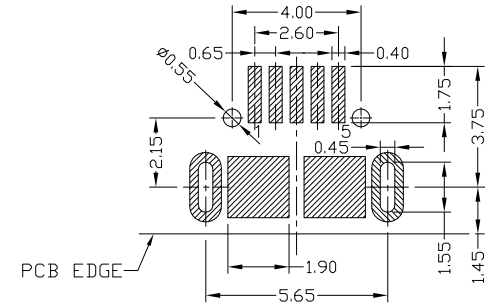
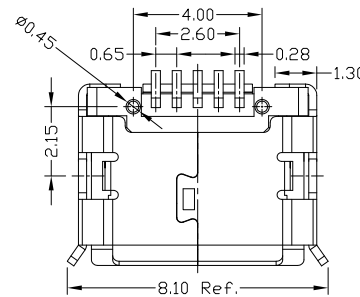






RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.




RECOMMENDED PCB LAYOUT

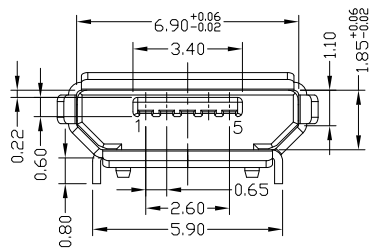

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE	PART NO.:	DR:	CHKD:	APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
3	SHELL	COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.* ±2*	雅安科技有限公司 ACCURATE INNOTECH INC. MICRO USB B TYPE F 5P 插板5.9 脚长0.8有脚柱锡脚加长0.4 DR: <i>Ricky</i> 2018/9/7 CHKD: <i>Ricky</i> 2018/9/7 APPD:	MUYF-05XT-4BHUA035 AII-HUA035	<i>Ricky</i> 2018/9/7 <i>Ricky</i> 2018/9/7	5:1 1/1 A	CUSTOMER DRAWING				
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X* ±1*						SEE NOTE			
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX*						SEE NOTE			
					.XXX ±0.15	.XXX*						SEE NOTE			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC							Q'TY			