

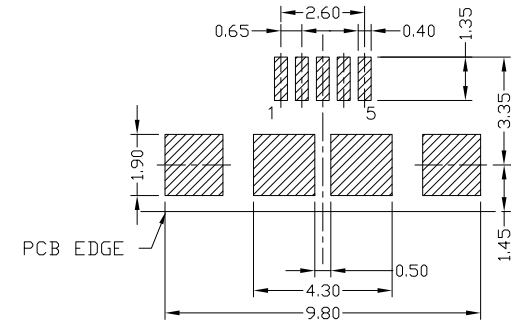
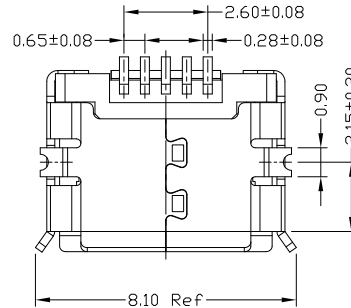







RoHS  
Compliant  
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.

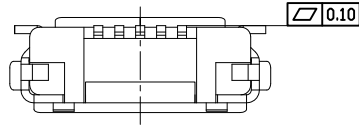

RECOMMENDED PCB LAYOUT

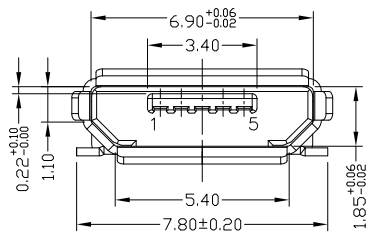

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE: -30°C TO +80°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.

3.DIMENSIONS MARKED "▼" TO BE

CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05\*T-4BHUA148

1:Au 1U"  
6:Au 30U"

T:TIN  
N:NICKEL

W:WHITE  
B:BLACK

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
3	SHELL	COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: MICRO USB B TYPE F 5P SMT 无脚柱锡脚加长0.4		PART NO.: MUYF-05*T-4BHUA148		
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X' ±1'		DR: Ricky 2018/5/8	DWG NO.: AII-HUA148		SCALE SHEET REV. CUSTOMER 5:1 1/1 A DRAWING	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'		CHKD: Ricky 2018/5/8				
NO	PARTS	MATERIAL	QTY	FINISHING	.XXX ±0.15	.XXX'	Q'TY	APPD:				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

