

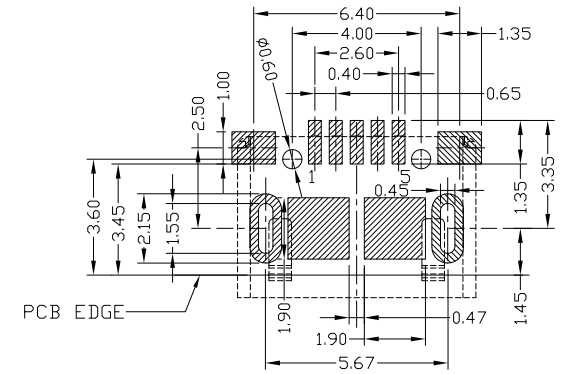







RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN.	NO.	APPD.

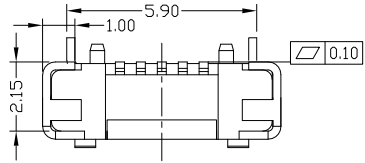

RECOMMENDED PCB LAYOUT

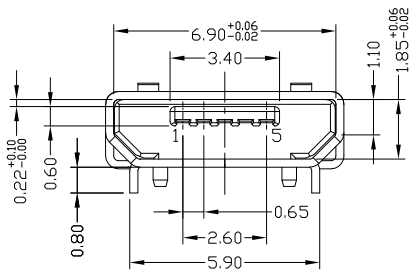

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-051T-4BHUA245
 1: Au 1U*
 6: Au 30U*
 T: TIN
 N: NICKEL
 W: WHITE
 B: BLACK
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

E	3	SHELL	COPPER ALLOY	1	PLATED TIN	.X ±0.15	.X' ±1'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC. TITLE: MICRO USB B TYPE F 5P 有焊脚 插板5.9脚长0.8有柱无导位 DR: <i>Ricky</i> 2022/09/23 CHKD: <i>Ricky</i> 2022/09/23 APPD:	PART NO.:	MUYF-05XT-4BHUA245		
	2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.10	.XX'	MAT'L	SEE NOTE			DWG NO.:	AII-HUA245	
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XXX ±0.05	.XXX'	FINISH	SEE NOTE	Q'TY		SCALE	SHEET	REV.	CUSTOMER
NO	PARTS	MATERIAL	QTY	FINISHING	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.						5:1	1/1	A	DRAWING