

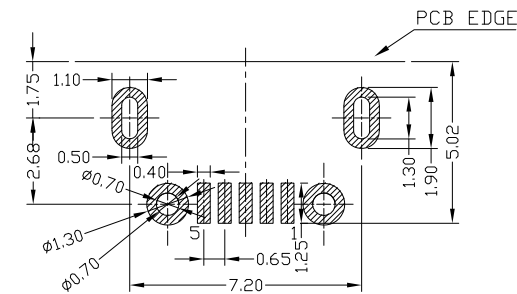


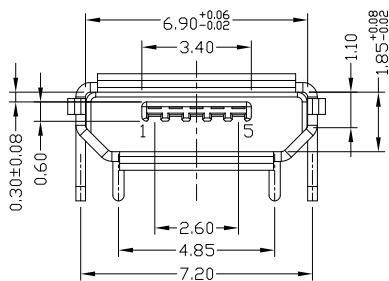





RoHS
Compliant
2002/95/EC

Halogen Free


REV.	ECN. NO.	APPD.




RECOMMENDED PCB LAYOUT



不锈钢双铆合



铜壳单铆合



NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-051T-4BHUA263
 1:Au 1U*
 6:Au 30U*
 T:TIN
 N:NICKEL
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING						
3	SHELL	COPPER ALLOY / STAINLESS STEEL	1	PLATED TIN	.X ±0.15	.X' ±1'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC. TITLE: MICRO USB B TYPE F 5P 四脚 全插牛角型 短针脚长1.2版 DR: <i>Ricky</i> 2022/09/28 CHKD: <i>Ricky</i> 2022/09/28 APPD:	
2	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.10	.XX'	MAT'L	SEE NOTE		PART NO.:
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XXX ±0.05	.XXX'	FINISH	SEE NOTE		MUYF-05XT-4BHUA263
										DWG NO.:
							Q'TY		AII-HUA263	
									SCALE	
									SHEET	
									REV.	
									CUSTOMER	
									DRAWING	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

