

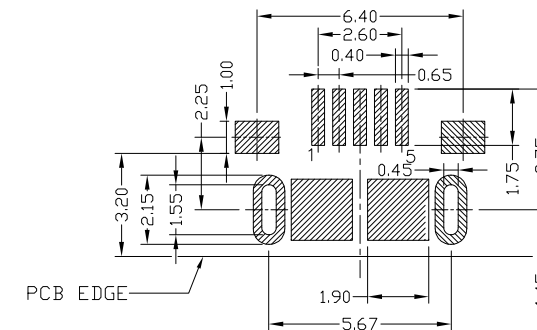




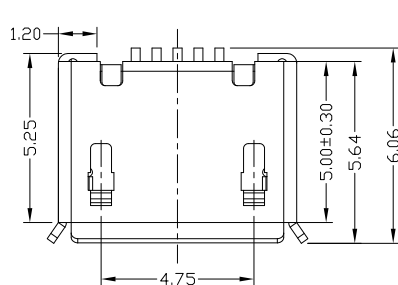


RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN. NO.	APPD.

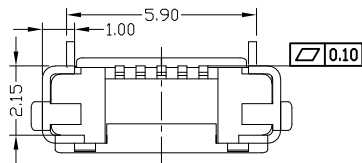

RECOMMENDED PCB LAYOUT

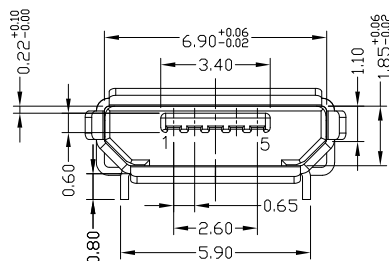

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05*T-4BHUA317
 1:Au 1U*
 6:Au 30U*
 T:TIN
 N:NICKEL
 W:WHITE
 B:BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE	PART NO.:	DR:	CHKD:	APPD:	SCALE	SHEET	REV.	CUSTOMER DRAWING
3	SHELL	COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.' ±2'	雅安科技有限公司 ACCURATE INNOTECH INC. MICRO USB B TYPE F 5P 有焊脚 插板5.9脚长0.8无柱锡脚加长0.4 DR: <i>Ricky</i> 2018/9/19 CHKD: <i>Ricky</i> 2018/9/19 APPD:	MUYF-05XT-4BHUA317 PART NO.: MUYF-05XT-4BHUA317 DWG NO.: AII-HUA317	<i>Ricky</i> 2018/9/19 <i>Ricky</i> 2018/9/19	5:1 1/1 A	5:1 1/1 A	CUSTOMER DRAWING			
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X' ±1'									
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX'									
					.XXX ±0.15	.XXX'									
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.							5:1 1/1 A								