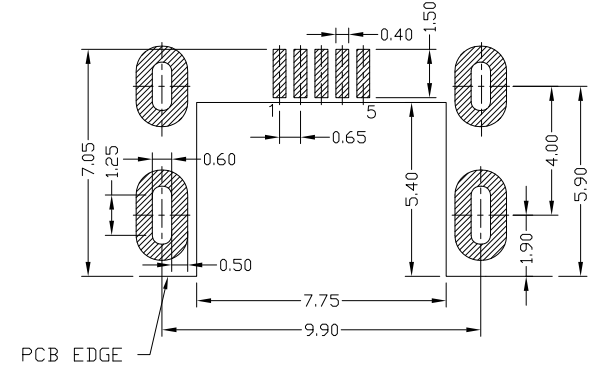


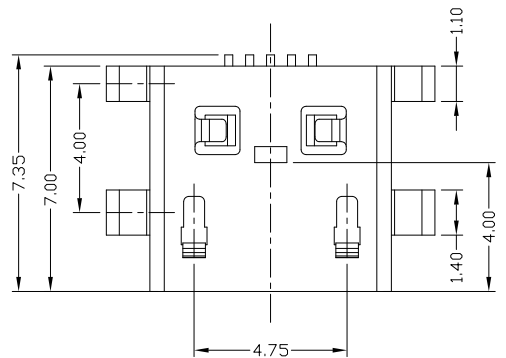
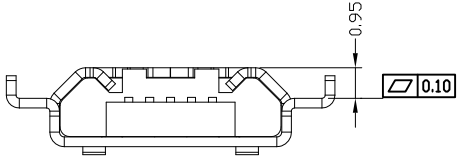
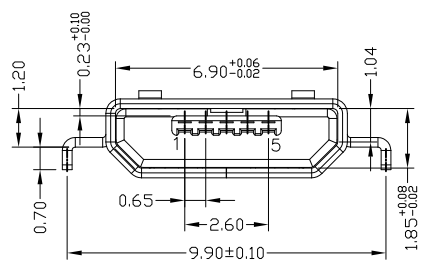

RoHS Compliant
 Process Capable 2002/95/EC
Halogen Free

REV.	ECN.	NO.	APPD.




RECOMMENDED PCB LAYOUT
 TOLERANCE: ±0.03



NOTES:

- ELECTRICAL:**
 - VOLTAGE CURRENT RATING: PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
 - OPERATING TEMPERATURE: -30°C TO +80°C.
- Mechanical:**
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.**

4.PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
3	SHELL	COPPER ALLOY	1	PLATED TIN	X. ±0.35	X.* ±2*	TITLE: MICRO USB B TYPE F 5P SMT沉板0.9 平口端子加长0.3 PART NO.: MUYF-05*T-4BHUA537	DR: Ricky 2018/5/3 DWG NO.: AII-HUA537	CHKD: Ricky 2018/5/3	APPD:	SCALE SHEET REV. CUSTOMER 5:1 1/1 A DRAWING	
2	HOUSING	LCP+30%GF	1	UL94V-0	.X ±0.30	.X.* ±1*						SEE NOTE
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX*						SEE NOTE
					.XXX ±0.15	.XXX*						SEE NOTE
					<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC</small>		Q'TY					