

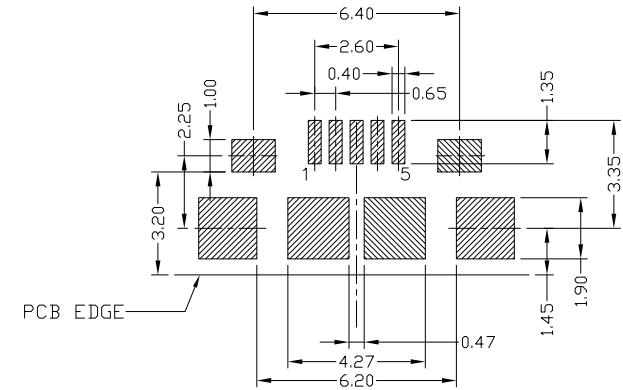
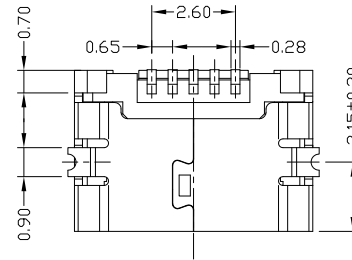






RoHS
Compliant
2002/95/EC

Halogen Free

REV.	ECN. NO.	APPD.

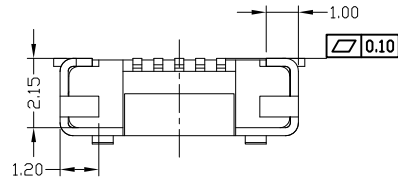

RECOMMENDED PCB LAYOUT

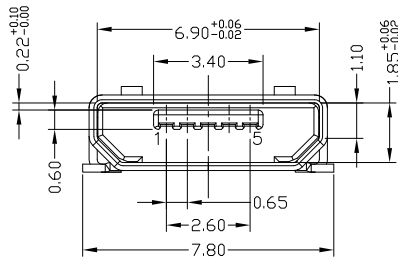

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING:PIN1&5 1.8AMP MAX / PIN2&3&4 1AMP MAX. ,30V AC;
- 2)INSULATION RESISTANCE: 100MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 100V AC; FOR 1 MIN.
- 5)OPERATING TEMPERATURE:-30°C TO +80°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.

3.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

MUYF-05*T-4BHUA538

1:Au 1U"
6:Au 30U"

T:TIN
N:NICKEL


W:WHITE
B:BLACK

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE:	PART NO.:
3	SHELL	COPPER ALLOY / STAINLESS STEEL	1	PLATED TIN	X. ±0.35	X.* ±2*	MICRO USB B TYPE F 5P SMT 有焊脚无柱无导位	MUYF-05*T-4BHUA538
2	HOUSING	LCP+30%.GF	1	UL94V-0	.X ±0.30	.X.* ±1*	DR: Ricky 2018/5/9	AII-HUA538
1	TERMINAL	COPPER ALLOY	5	PLATED GOLD	.XX ±0.25	.XX*	CHKD: Ricky 2018/5/9	SCALE SHEET REV. CUSTOMER 5:1 1/1 A DRAWING
					.XXX ±0.15	.XXX*	APPD:	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.



雅安科技有限公司
ACCURATE INNOTECH INC.

PART NO.: MUYF-05*T-4BHUA538

DWG NO.: AII-HUA538

SCALE SHEET REV. CUSTOMER
5:1 1/1 A DRAWING