

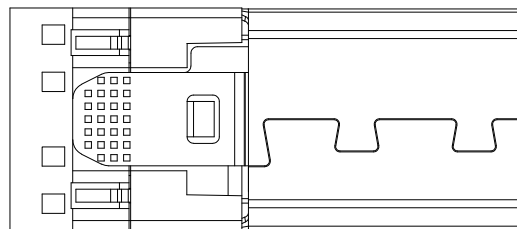
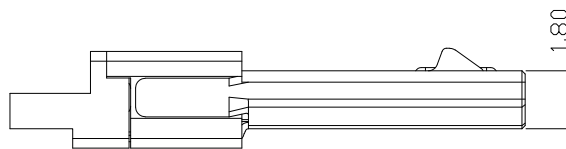





RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.

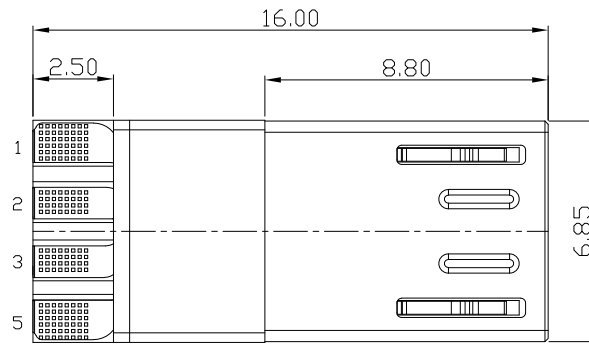

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 1.5AMP,30V AC;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE: -25°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 8N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.  
MUYM-051N-4BSD06

1:Au 1U"  
6:Au 30U"

1:WHITE  
B:BLACK

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING
5	TERMINAL	COPPER ALLOY	5	PLATED GOLD/TIN
4	SPRING	STAINLESS STEEL	2	
3	SHELL	STAINLESS STEEL	1	PLATED NICKEL
2	MOLDING	LCP+30%GF	1	UL94V-0
1	HOUSING	LCP+30%GF	1	UL94V-0

X.	±0.25	X.*	±3*
.X	±0.15	.X*	
.XX	±0.08	.XX*	
.XXX	±0.03	.XXX*	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
MAT'L	SEE NOTE				
FINISH	SEE NOTE	TITLE:	MICRO USB BM 一排焊线式 前后四长方体 T=3.0		
Q'TY		DR:	Ricky 2019/11/05		
		CHKD:	Ricky 2019/11/05		
		APPD:	SCALE	SHEET	REV.
			1:1	1/1	A
			PART NO.: MUYM-051N-4BSD06		
			DWG NO.: AII-SD06		
			CUSTOMER DRAWING		