






RoHS Compliant  
2002/95/EC


PART NO: RI  -   G -  -

REV.	ECN. NO.	APPD.

DIMENSION:(UNIT:mm/inches)

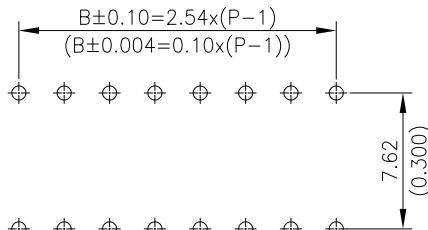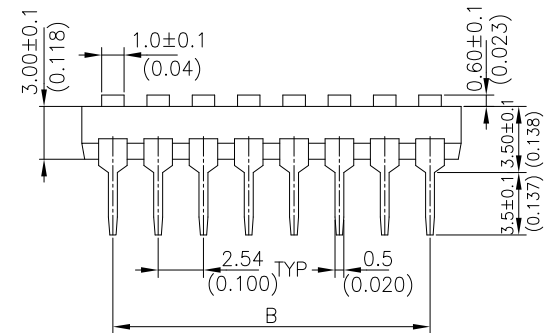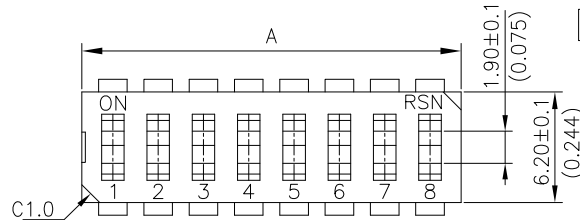

P.C.B. LAYOUT

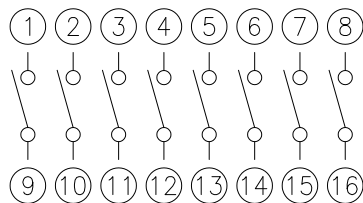


CIRCUIT DIAGRAM

Actuator Type:  
 R = Recessed Actuator (Top Tape Sealed Available Only)


Terminal Type:  
 S = Splay Terminal  
 H = Straight Terminal

Terminal:  
 G = Gold Plating

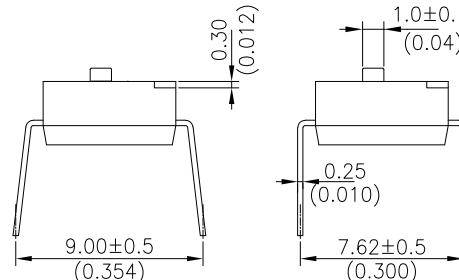


RI-G-S


RI-G-H



RIR-G-S



RIR-G-H

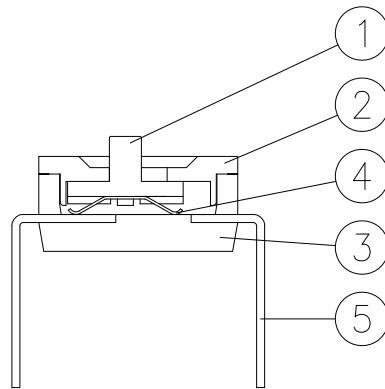

CONSTRUCTION

Prod No.	No.ofPOS	DIM.A	DIM.B
RI/RIR-01	01	3.48(0.137)	-----
RI/RIR-02	02	6.02(0.237)	2.54(0.100)
RI/RIR-03	03	8.56(0.337)	5.08(0.200)
RI/RIR-04	04	11.10(0.437)	7.62(0.300)
RI/RIR-05	05	13.64(0.537)	10.16(0.400)
RI/RIR-06	06	16.18(0.637)	12.70(0.500)
RI/RIR-07	07	18.72(0.737)	15.24(0.600)
RI/RIR-08	08	21.26(0.837)	17.78(0.700)
RI/RIR-09	09	23.80(0.937)	20.32(0.800)
RI/RIR-10	10	26.34(1.037)	22.86(0.900)
RI/RIR-12	12	31.42(1.237)	27.94(1.100)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-0 NYLON	MOLDED WHITE
2	COVER	UL94V-0 NYLON	MOLDED BLACK
3	BASE	UL94V-0 NYLON	MOLDED BLACK
4	CONTACT	BERYLLIUM COPPER	GOLD PLATED AT CONTACT AREA
5	TERMINAL	BRASS	GOLD PLATING

尺寸範圍	容許值	UNITS mm(IN)
0-4	±0.05	MAT'L
4-16	±0.1	SEE NOTE
16-50	±0.15	FINISH
		SEE NOTE
		Q'TY

雅安科技有限公司  
ACCURATE INNOTECH INC.

TITLE: MACHINE INSERT TABLE TYPE DIP SWITCH

DR: *Ricky* 2014/04/08

CHKD: *Ricky* 2014/04/08

APPD:

PART NO.: RI/RIR SERIES

DWG NO.: ATR-RI

SCALE: 1:1

SHEET: 1/1

REV. A

CUSTOMER DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.