






RoHS
Compliant
2002/95/EC


REV.	ECN. NO.	APPD.

PART NO: RM - G - -

DIMENSION:(UNIT:mm/inches)

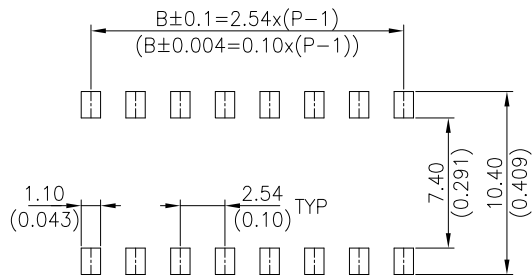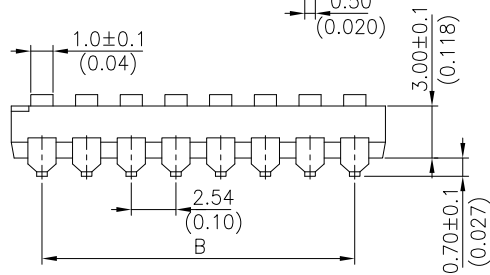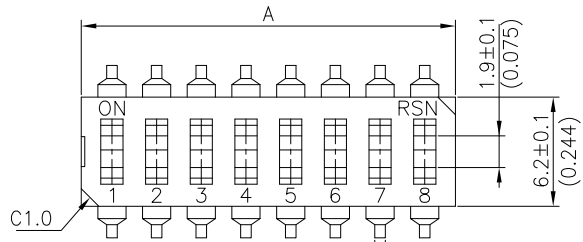

P.C.B. LAYOUT

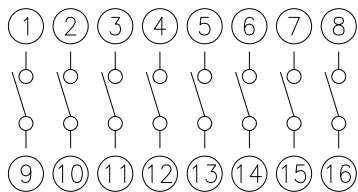

CIRCUIT DIAGRAM


Package:
=Tube
=Tape&Reel

Seal:
=Top Tape Sealed


Terminal:
=Gold Plating

Number of positions:


Actuator Type:
=Recessed Actuator(Top Tape Sealed Available Only)



RMR SERIES



RM SERIES

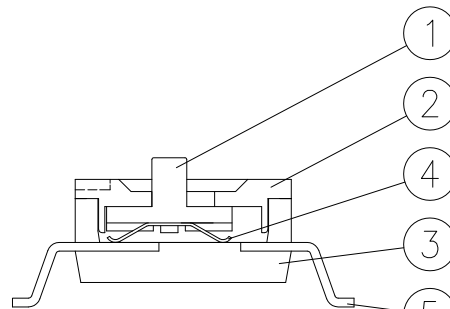

CONSTRUCTION

Prod No.	No.ofPOS	DIM.A	DIM.B
RM/RMR-01	01	3.48(0.137)	-----
RM/RMR-02	02	6.02(0.237)	2.54(0.100)
RM/RMR-03	03	8.56(0.337)	5.08(0.200)
RM/RMR-04	04	11.10(0.437)	7.62(0.300)
RM/RMR-05	05	13.64(0.537)	10.16(0.400)
RM/RMR-06	06	16.18(0.637)	12.70(0.500)
RM/RMR-07	07	18.72(0.737)	15.24(0.600)
RM/RMR-08	08	21.26(0.837)	17.78(0.700)
RM/RMR-09	09	23.80(0.937)	20.32(0.800)
RM/RMR-10	10	26.34(1.037)	22.86(0.900)
RM/RMR-12	12	31.42(1.237)	27.94(1.100)

ITEM	DES	MATERIALS	TREATMENT
1	ACTUATOR	UL94V-O NYLON	MOLDED WHITE
2	COVER	UL94V-O NYLON	MOLDED BLACK
3	BASE	UL94V-O NYLON	MOLDED BLACK
4	CONTACT	BERYLLIUM COPPER	GOLD PLATED AT CONTACT AREA
5	TERMINAL	BRASS	GOLD PLATING

尺寸範圍	容許值	UNITS mm(IN)
0-4	±0.05	MAT'L
4-16	±0.1	SEE NOTE
16-50	±0.15	FINISH
		SEE NOTE
		Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE: SURFACE MOUNTING TYPE DIP SWITCH		PART NO.: RM/RMR SERIES	
DR: Ricky 2014/04/08		DWG NO.: ATR-RM	
CHKD: Ricky 2014/04/08		SCALE	SHEET
APPD:		1:1	1/1
		REV. A	CUSTOMER DRAWING