







RoHS  
Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.


### DIMENSIONS





### MODEL CODE

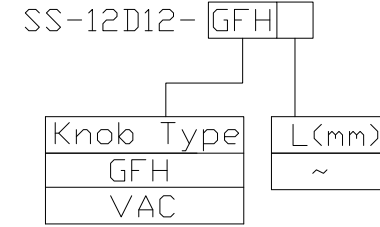

P.C.B LAYOUT  
BOTTOM VIEW



CIRCUIT DIAGRAM

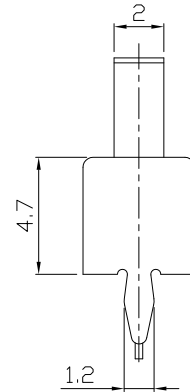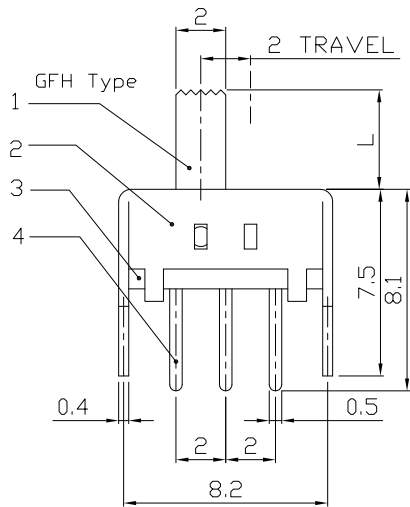

### ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	1P2T
CONTACT RESISTANCE	30mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					WITHIN 1.5mm: ±0.1mm	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
7					OVER 1.5mm: ±0.2mm	MAT'L					
6	SPRING PLATE	SUS	1	NATURAL		SEE NOTE		TITLE:	PART NO.:		
5	CONTACT	PBS	1	Ag CLAD				SLIDE SWITCH / VERTICAL	SS-12D12		
4	TERMINAL	BRASS	1	Ag PLATED				DR:	Ricky 2016/08/04		
3	TERMINAL CASE	PHENOLIC RESIN	1	NATURAL				CHKD:	Ricky 2016/08/04		
2	COVER	MILD STEEL	1	Ni PLATED				APPD:			
1	KNOB	NYLON+F.G	1	BLACK				SCALE	SHEET	REV.	CUSTOMER
NO.	PARTS	MATERIAL	Q'TY	FINISHING				3:1	1/1	A	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

