





RoHS Compliant  
2002/95/EC

MODEL CODE

SS-23D26-GEE


REV.	ECN. NO.	APPD.

DIMENSIONS

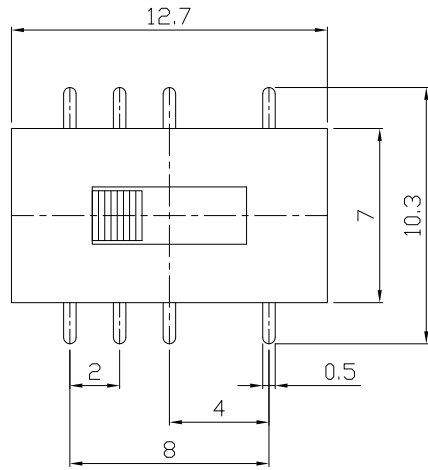


Knob Type
GEE
VAC



L(mm)
~

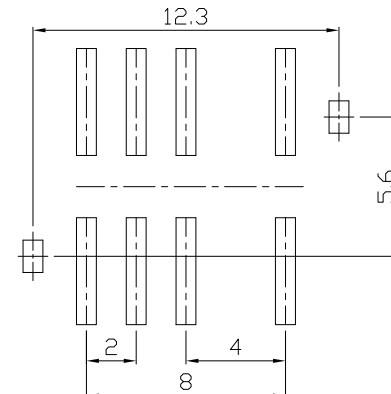

P.C.B LAYOUT  
BOTTOM VIEW

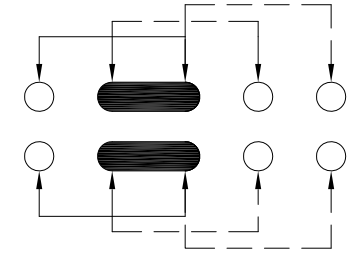

CIRCUIT DIAGRAM

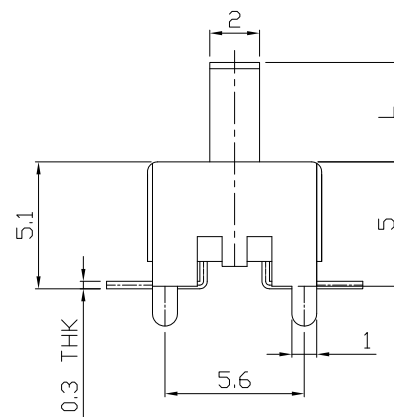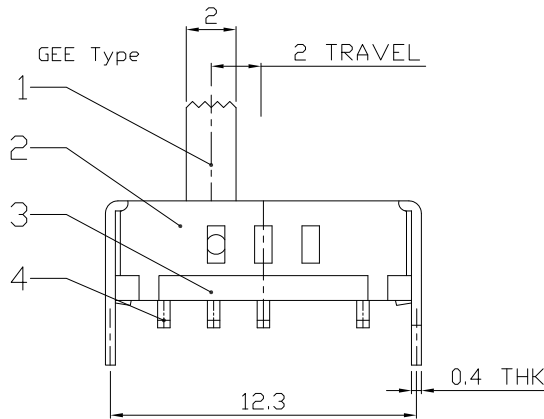

ELECTRO-MECHANICAL CHARACTERISTICS

Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	2P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	NON-SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

NO.	PARTS	MATERIAL	Q'TY	FINISHING
8				
7				
6	SPRING PLATE	PBS STRIP	1	NATURAL
5	CONTACT CLIP	PBS STRIP	2	Ag PLATED
4	TERMINAL	BRASS STRIP	8	Ag PLATED
3	BASE	PHENOLIC RESIN	1	NATURAL
2	FRAME	STEEL STRIP	1	Ni PLATED
1	KNOB	POM	1	WHITE/BLACK

WITHIN 1.5mm: ±0.1mm  
OVER 1.5mm: ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	雅安科技有限公司 ACCURATE INNOTECH INC.			
mm	TITLE: SLIDE SWITCH / VERTICAL		PART NO.: SS-23D26	
MAT'L	DR: Ricky 2015/09/07		DWG NO.: ADL-23D26	
SEE NOTE	CHKD: Ricky 2015/09/07		SCALE	SHEET
FINISH	APPD:		3:1	1/1
SEE NOTE			REV.	CUSTOMER DRAWING
Q'TY			A	