




RoHS Compliant  
2002/95/EC

REV.	ECN.	NO.	APPD.



DIMENSIONS

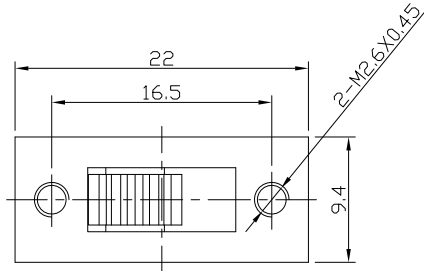

MODEL CODE



SS-43D01-GDD

Knob Type	L(mm)
GDD	~

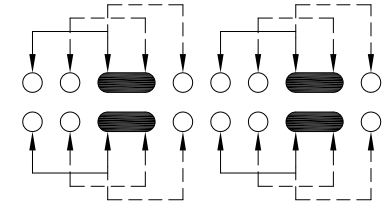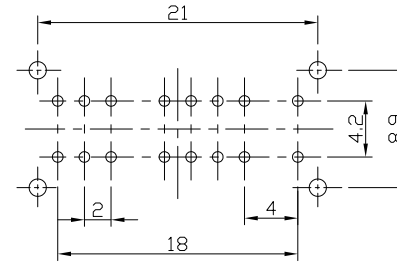

P.C.B LAYOUT  
BOTTOM VIEW

CIRCUIT DIAGRAM

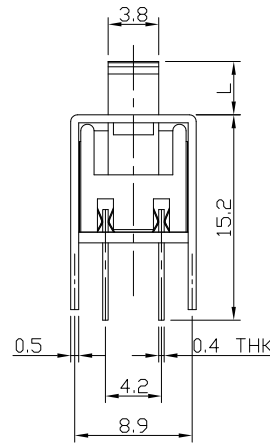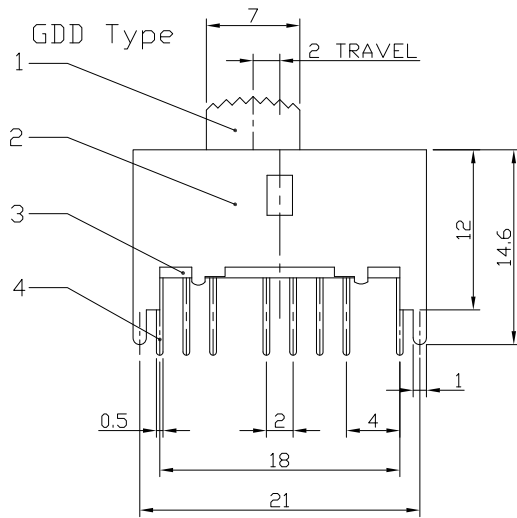

ELECTRO-MECHANICAL CHARACTERISTICS  
Refer to additional specifications

RATING	0.3A 50V DC
CIRCUIT	4P3T
CONTACT RESISTANCE	100mΩ MAX.
TIMING	SHORTING
TRAVEL	2mm
OPERATING FORCE	250±100gf
OPERATING LIFE(cycles)	10,000

8					
7	STEEL BALL	STEEL	2	NATURAL	
6	SPRING	STEEL WIRE	1	NATURAL	
5	CONTACT CLIP	PBS STRIP	4	Ag PLATED	
4	TERMINAL	BRASS STRIP	16	Ag PLATED OVER Ni PLATED	
3	BASE	PHENOLIC RESIN	1	NATURAL	
2	FRAME	STEEL STRIP	1	Ni PLATED	
1	KNOB	POM	1	BLACK	
NO.	PARTS	MATERIAL	Q'TY	FINISHING	

WITHIN 1.5mm: ±0.1mm  
OVER 1.5mm: ±0.2mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

UNITS	mm
MAT'L	SEE NOTE
FINISH	SEE NOTE
Q'TY	

**雅安科技有限公司**  
**ACCURATE INNOTECH INC.**

TITLE:	SLIDE SWITCH / VERTICAL	PART NO.:	SS-43D01
DR:	Ricky 2015/05/29	DWG NO.:	ADL-43D01
CHKD:	Ricky 2015/05/29	SCALE	3:2
APPD:		SHEET	1/1
		REV.	A
		CUSTOMER DRAWING	