




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

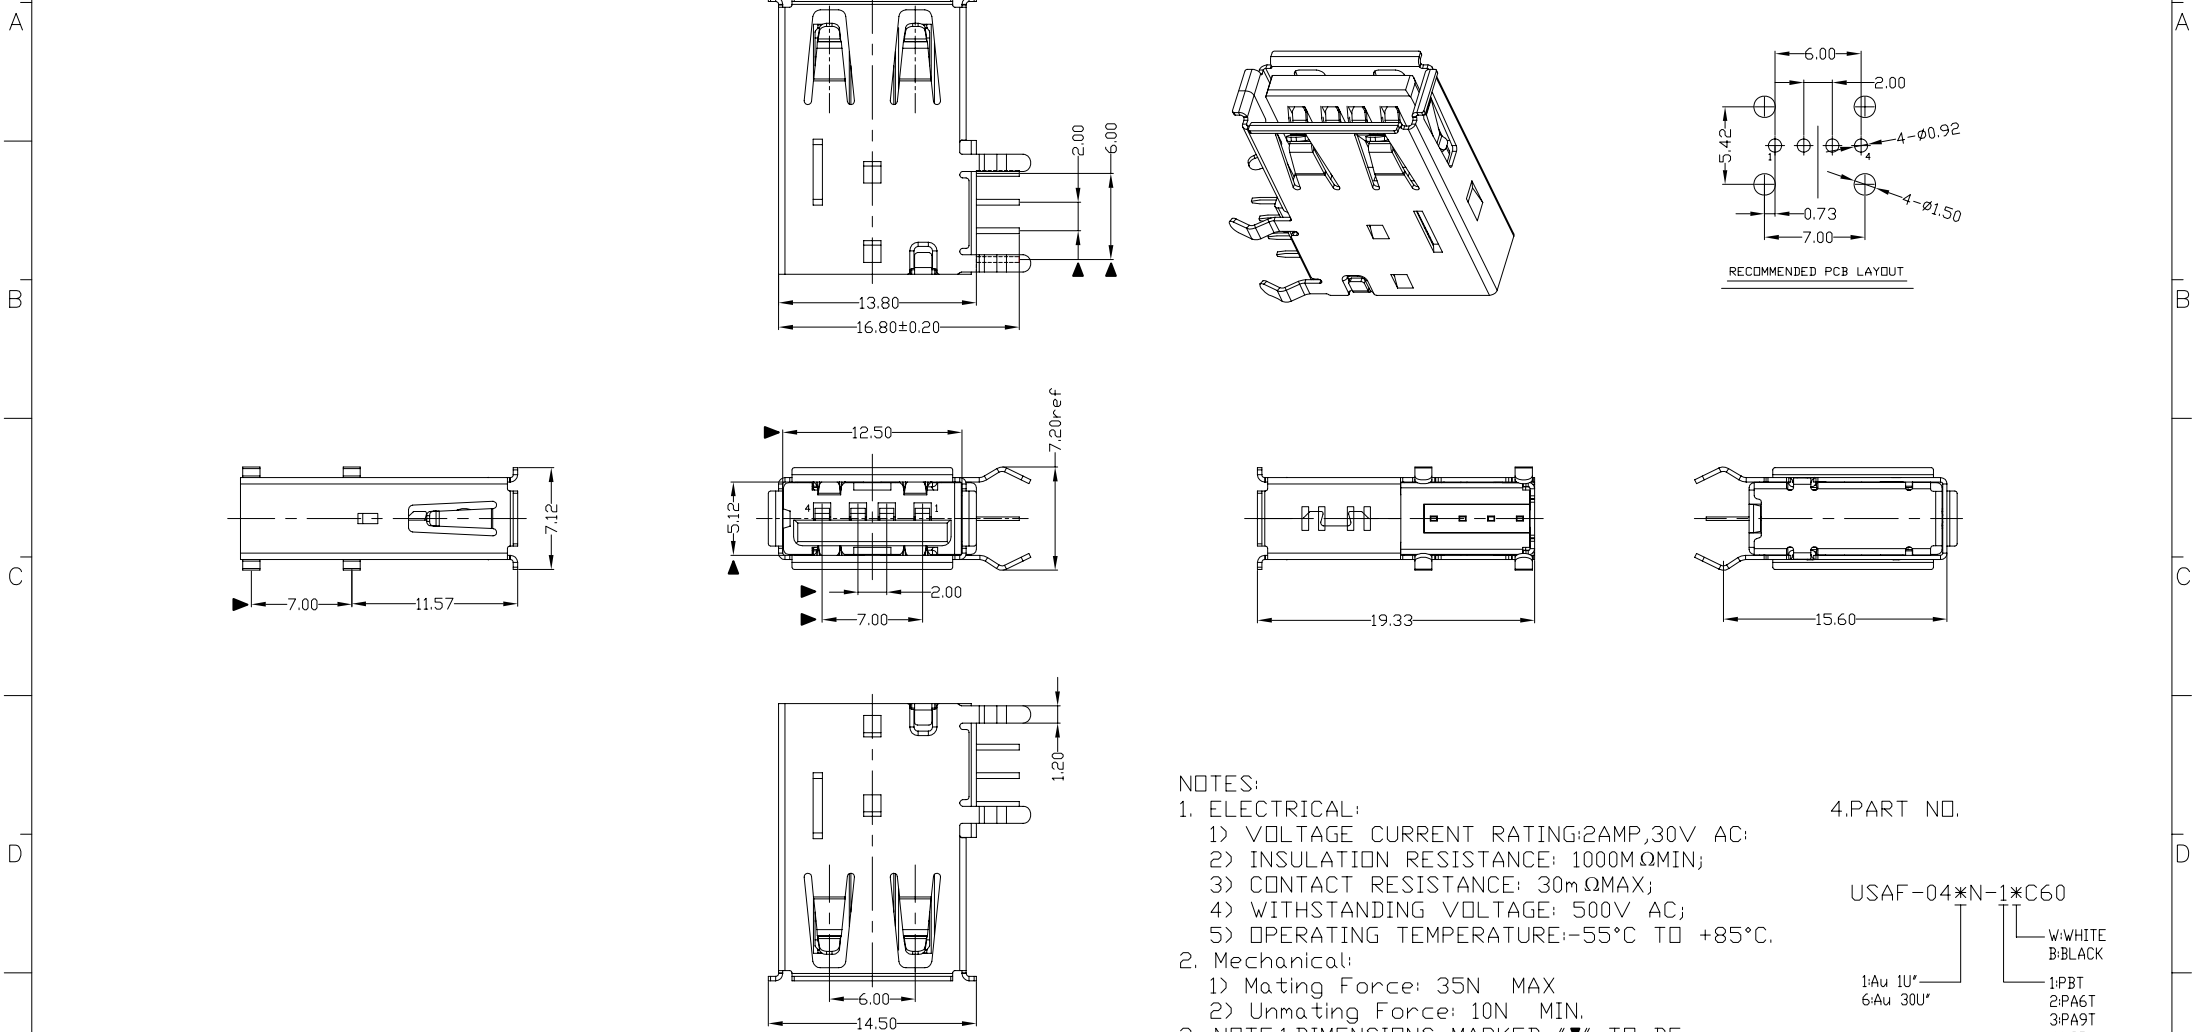

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04*N-1*C60
 1:Au 1U*
 6:Au 30U*
 W: WHITE
 B: BLACK
 1:PBT
 2:PA6T
 3:PA9T
 4:PC

Bill of materials:

5	BACK COVER	SPCC	1	PLATED NICKEL	X. ±0.35	X.' ±2'	UNITS	mm
4	BOTTOM COVER	PBT	1	UL94V-0	.X ±0.30	.X' ±1'	MAT'L	SEE NOTE
3	HOUSING	PBT	1	UL94V-0	.XX ±0.25	.XX'	FINISH	SEE NOTE
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX'	Q'TY	SEE NOTE
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN				
NO	PARTS	MATERIAL	QTY	FINISHING				

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

雅安科技有限公司
ACCURATE INNOTECH INC.

TITLE:	USB A/F 90° DIP侧插长体	PART NO.:	USAF-04*N-1*C60
DR:	gan 2012/6/29	DWG NO.:	AII-C60
CHKD:	gan 2012/6/29	SCALE	1:1
APPD:		SHEET	1/1
		REV.	B
		CUSTOMER DRAWING	