

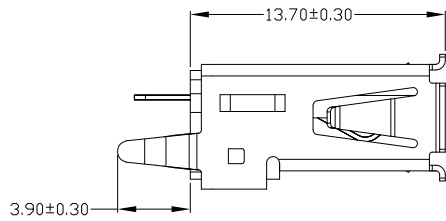
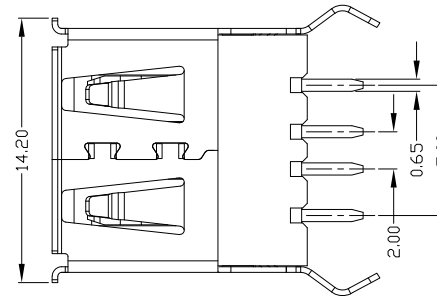

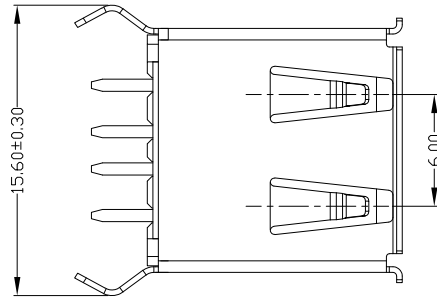



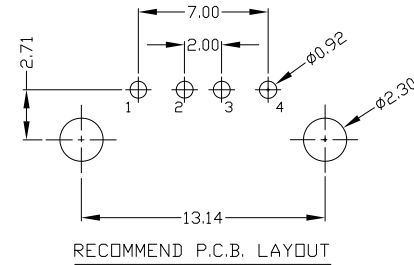

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

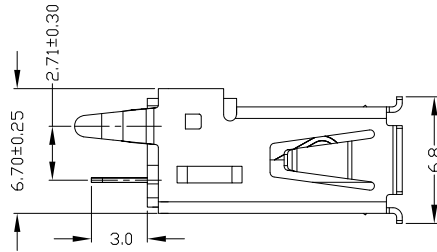

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -25°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-041N-1*P65

1: Au 1U*
6: Au 30U*

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.						
4	COVER	PBT	1	UL94V-0	.X	±0.30	X.*	±3*	MAT'L	TITLE:	PART NO.:		
3	HOUSING	PBT	1	UL94V-0	.XX	±0.20			SEE NOTE	USB A/F 180° 半包插板式弯脚(13.7) 外壳缩短0.60	USAF-04*N-1*P65		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX	±0.10			SEE NOTE	DR:	DWG NO.:		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN					SEE NOTE	Ricky 2024/09/29	AII-P65		
										CHKD:	SCALE SHEET REV. CUSTOMER		
										Ricky 2024/09/29	DRAWING		
										APPD:			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

