







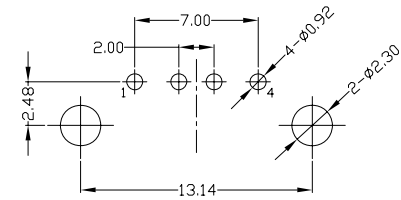


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.



RECOMMEND PCB LAYOUT

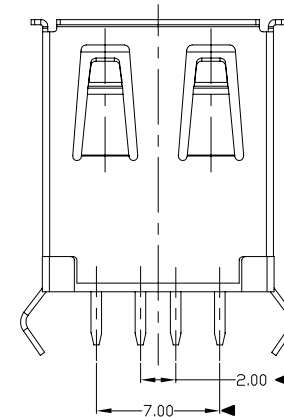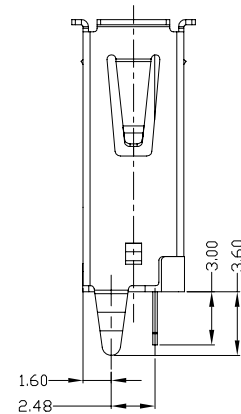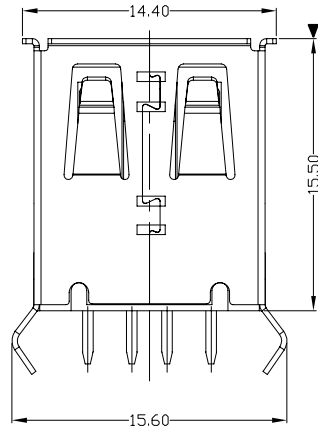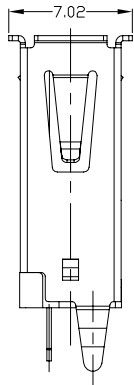

NOTES:

1. ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2.0AMP,30V AC;
- 2) INSULATION RESISTANCE: 1000MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 500V AC;
- 5) OPERATING TEMPERATURE:-55°C TO +85°C.

2. Mechanical:

- 1) Mating Force: 35N MAX
- 2) Unmating Force: 10N MIN.

3. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-04*N-1*PA8

W:WHITE
B:BLACK

1:Au 1U"
6:Au 30U"

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.								
4	COVER	PBT	1	UL94V-0	X. ±0.35	X.' ±2*	TITLE: USB A/F 180° DIP(15.50) PART NO.: USAF-04*N-1*PA8	雅 安 科 技 有 限 公 司 ACCURATE INNOTECH INC.							
3	HOUSING	PBT	1	UL94V-0	.X ±0.3	.X' ±1*						DR: gan 2012/7/05	DWG NO.: AII-PA8		
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX*						CHKD: gan 2012/7/05	SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING		
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*						APPD:			
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC										