

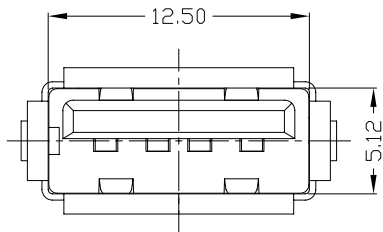
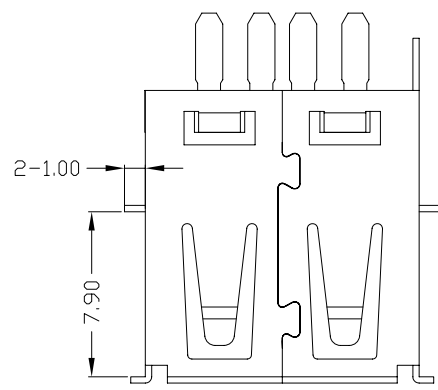
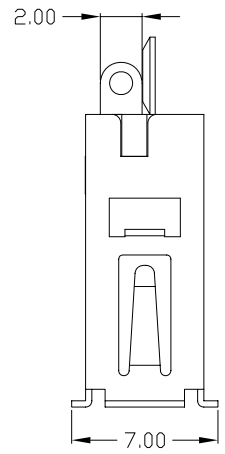


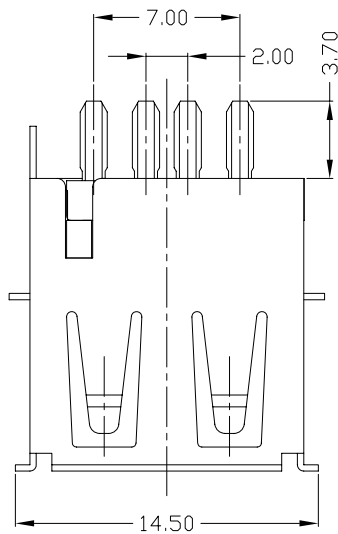

RoHS  
Compliant  
2002/95/EC


REV.	ECN. NO.	APPD.

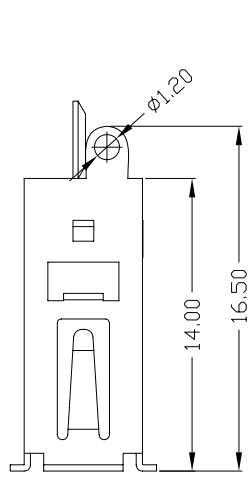

NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
  - INSULATION RESISTANCE: 1000M ΩMIN;
  - CONTACT RESISTANCE: 30m ΩMAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -55°C TO +105°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	雅安科技有限公司 ACCURATE INNOTECH INC.						
					.X ±0.3	.X.* ±1*	mm							
3	HOUSING	PBT+30%GF	1	UL94V-0	.XX ±0.25	.XX*	MAT'L	SEE NOTE	TITLE: USB AF 180度 焊线全包中体 (侧卡, 左焊脚)		PART NO.: USAF-04*N-1*S32			
2	SHELL	SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	FINISH	SEE NOTE	DR: gan 2015/09/21		DWG NO.: AII-S32			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY	CHKD: gan 2015/09/21		SCALE	SHEET	REV.	CUSTOMER DRAWING
								APPD:	1:1	1/1	B			