






RoHS  
Compliant  
2002/95/EC




REV.	ECN.	NO.	APPD.

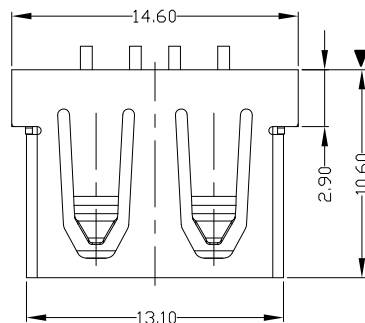


MYLAR 示意图

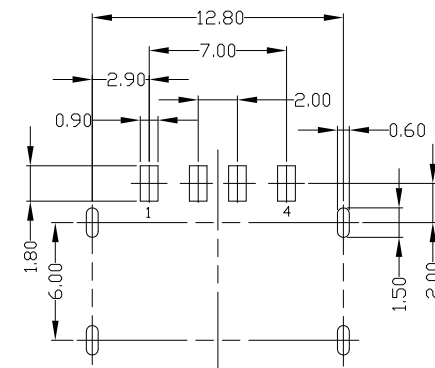

RECOMMENDED PCB LAYOUT



外壳铆合面视图



NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼"  
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-04\*N-4\*V67

1:Au 1U"  
6:Au 30U"

W: WHITE  
B: BLACK

1: PBT  
2: PA6T  
3: PA9T  
4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.' ±2'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.			
3	HOUSING	LCP	1	UL94V-0	.X ±0.3	.X' ±1'	MAT'L		TITLE: USB A/F 90° SMT 短体(10.6) 弹片尖角形		PART NO.: USAF-04*N-4*V67	
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE		DR: gan 2012/6/30		DWG NO.: AII-V67	
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX'	FINISH		CHKD: gan 2012/6/30		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING	
							Q'TY		APPD:			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

