

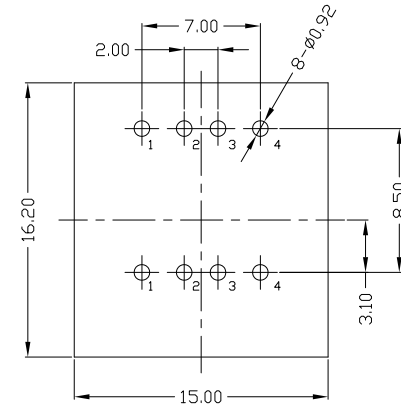


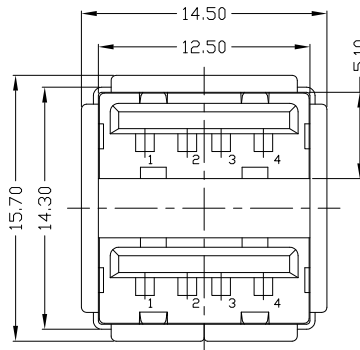


RoHS
Compliant
2002/95/EC

REV.	ECN. NO.	APPD.

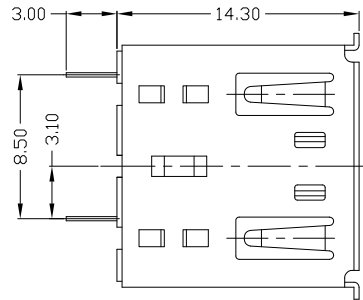


RECOMMENDED PCB LAYOUT

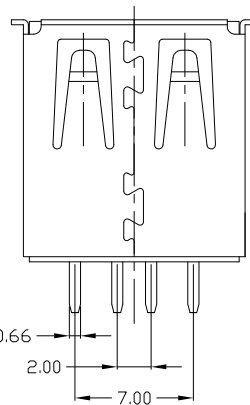

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩMIN;
 - CONTACT RESISTANCE: 30mΩMAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.*	UNITS	雅安科技有限公司 ACCURATE INNOTECH INC.												
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	X. ±0.35	X.* ±2*	mm	TITLE: USB AF 180° 双层插板短体 (平弹) 成品		PART NO.: USAF-08*N-1*P34										
3	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.3	.X.* ±1*	MAT'L						DR: gan 2014/09/26		DWG NO.: AII-P34					
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XX ±0.25	.XX.*	SEE NOTE										CHKD: gan 2014/09/26		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING	
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.XXX ±0.15	.XXX.*	SEE NOTE													
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY												