


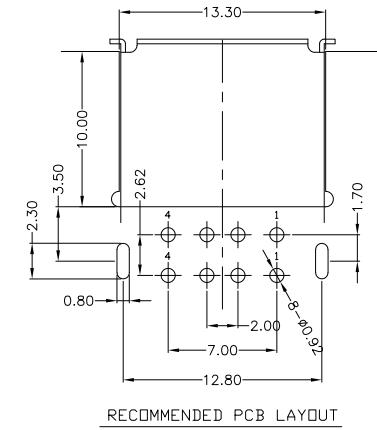

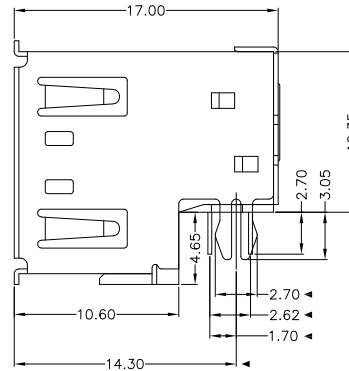




RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



NOTES:

- ELECTRICAL:
  - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
  - INSULATION RESISTANCE: 1000MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 500V AC;
  - OPERATING TEMPERATURE: -20°C TO +60°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-08XN-1XR31

- 1: Au 1U"
- 5: Au 15U"
- 6: Au 30U"
- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.						
6	CLIP	STAINLESS STEEL	1		X. ±0.35	X.' ±2'	SEE NOTE	TITLE: USB AF 90° 双层沉板正向		PART NO.: USAF-08XN-1XR31			
5	BOTTOM PLUG	PBT+30%GF	1	UL94V-0	.X ±0.3	.X' ±1'		SEE NOTE	DR: Ricky 2014/04/28		DWG NO.: AII-R31		
4	BACK SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX'	SEE NOTE		CHKD: Ricky 2014/04/28		SCALE	SHEET	REV.
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	.XXX ±0.15	.XXX'		Q'TY	APPD:	1:1	1/1	B	DRAWING
2	HOUSING	PBT+30%GF	1	UL94V-0	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.								
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN									