Process Capable

RoHS Compliant 2002/95/EC

| REV. | ECN. NO. | APPD. |
|---|---|---|
| | | |
| | | |
| | | |

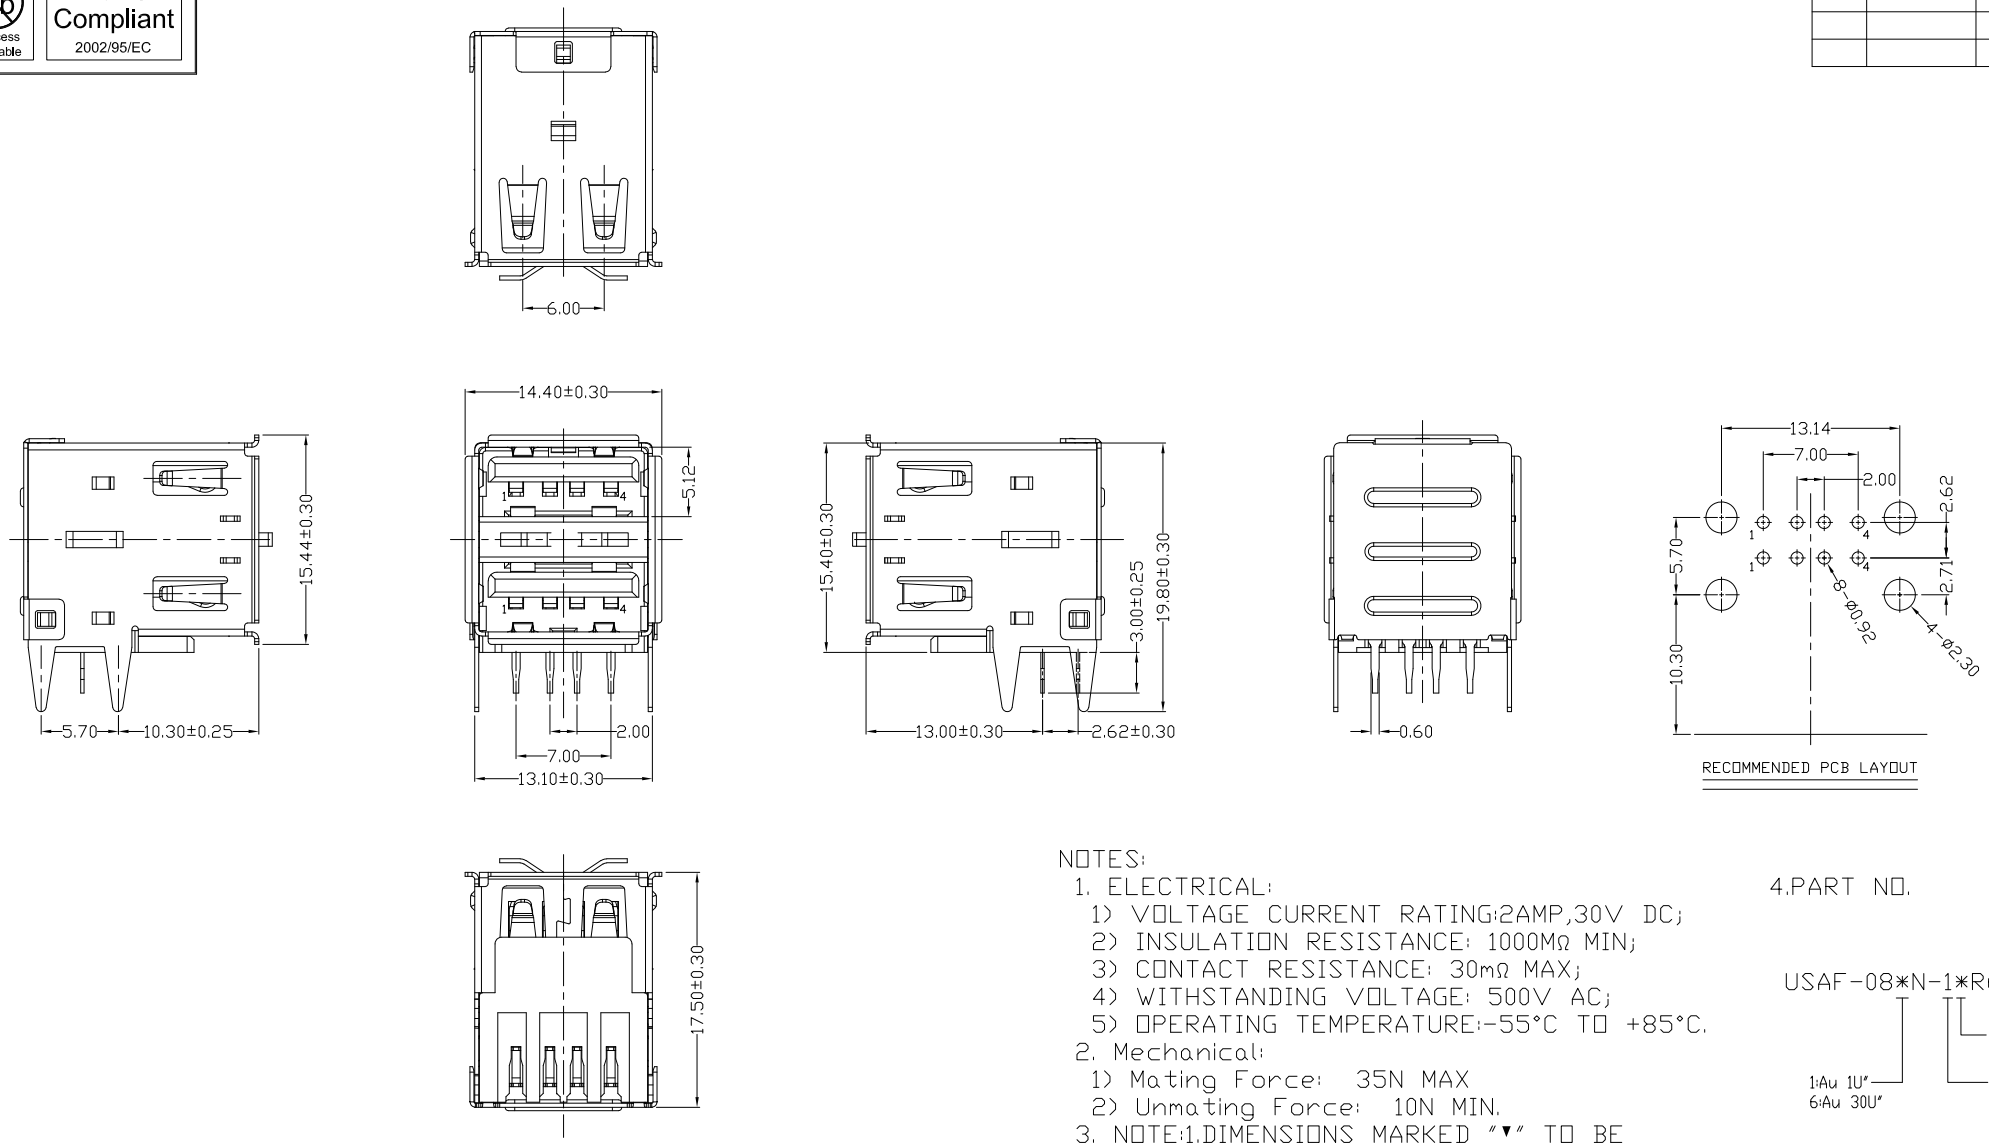


NOTES:

1. ELECTRICAL:
   1) VOLTAGE CURRENT RATING:2AMP,30V DC;
   2) INSULATION RESISTANCE: 1000MΩ MIN;
   3) CONTACT RESISTANCE: 30mΩ MAX;
   4) WITHSTANDING VOLTAGE: 500V AC;
   5) OPERATING TEMPERATURE:-55°C TO +85°C.
2. Mechanical:
   1) Mating Force: 35N MAX
   2) Unmating Force: 10N MIN.
3. NOTE:1.DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART NO.

USAF-08*N-1*R604

- 1:Au 1U"
- 6:Au 30U"
- W:WHITE
- B:BLACK
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

Bill of materials:

| NO | PARTS | MATERIAL | QTY | FINISHING |
|---|---|---|---|---|
| 5 | CLIP | COPPER ALLOY | 1 | PLATED NICKEL |
| 4 | BACK COVER | SPCC | 1 | PLATED NICKEL |
| 3 | HOUSING | PBT | 1 | UL94V-0 |
| 2 | SHELL | COPPER ALLOY | 1 | PLATED NICKEL |
| 1 | TERMINAL | COPPER ALLOY | 8 | PLATED GOLD/TIN |

| TOLERANCES | ANGLES |
|---|---|
| .X ±0.30 | ±3° |
| .XX ±0.20 | |
| .XXX ±0.10 | |

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC .AND SHALL NOT BE REPRODUCED. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

UNITS mm

MAT'L SEE NOTE

FINISH SEE NOTE

Q'TY

雅安科技有限公司
ACCURATE INNOTECH INC.

TITLE: USB AF 90度DIP雙層半包雙外彈直腳

PART NO.: USAF-08*N-1*R604

DR: Ricky 2021/05/24

DWG NO.: AII-R604

CHKD: Ricky 2021/05/24

APPD:

| SCALE | SHEET | REV. | |
|---|---|---|---|
| 1:1 | 1/1 | B | CUSTOMER DRAWING |