




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

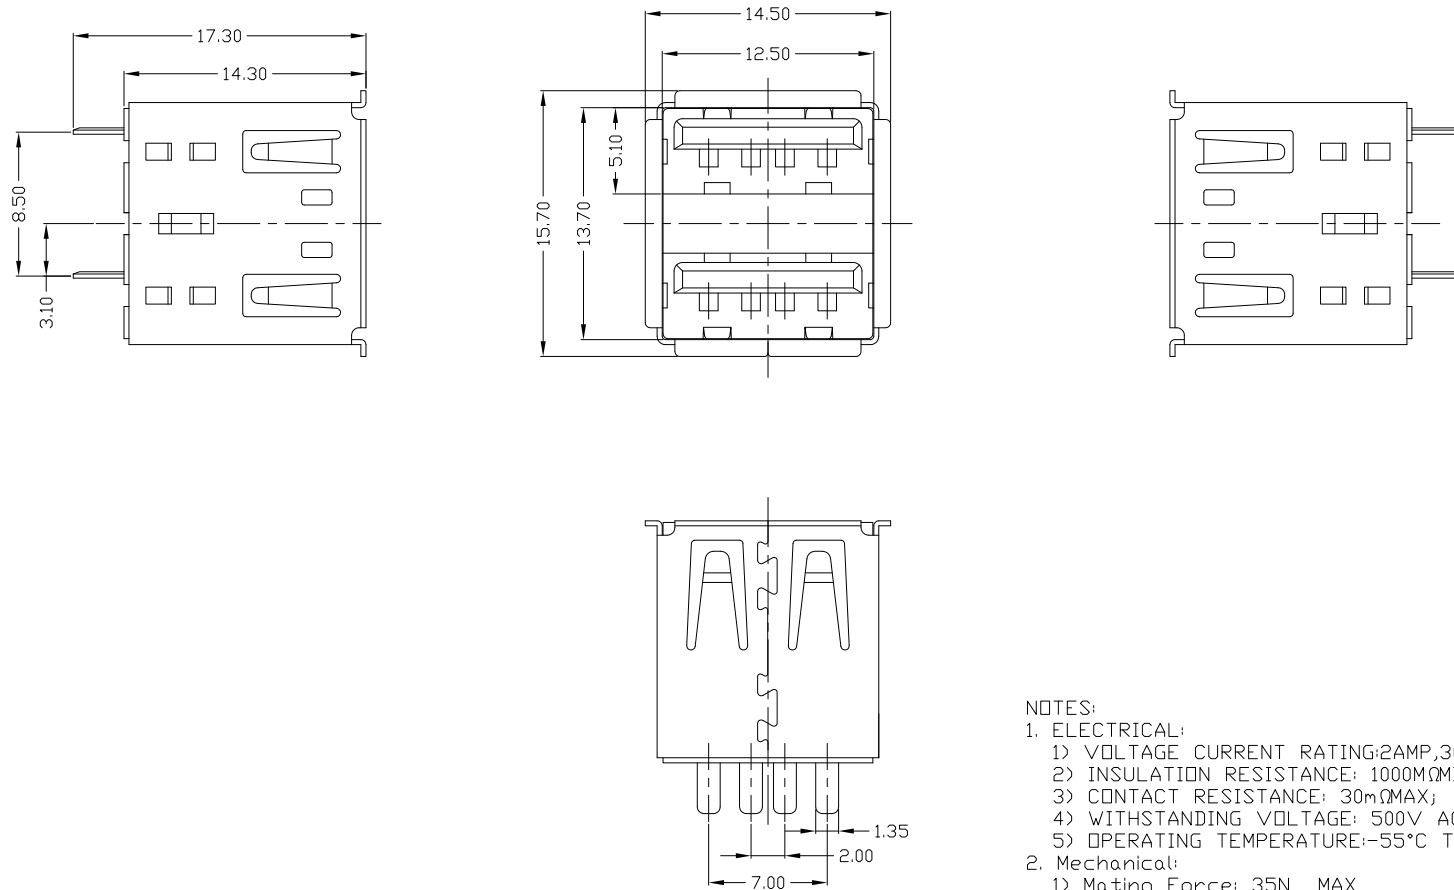

NOTES:

- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000M Ω MIN;
 - CONTACT RESISTANCE: 30m Ω MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-08*N-1*S34
 1Au 1U*
 6Au 30U*
 W/WHITE
 B/BLACK
 1PBT
 2PA6T
 3PA9T
 4LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X.	X.* \pm 0.35	.X	.X* \pm 0.3	.XX	.XX* \pm 0.25	.XXX	.XXX* \pm 0.15	UNITS	mm	MAT'L	SEE NOTE	FINISH	SEE NOTE	Q'TY	DR:	CHKD:	APPD:	SCALE	SHEET	REV.	CUSTOMER											
4	CLIP	COPPER ALLOY	1	PLATED NICKEL	X.	X.* \pm 2*	.X	.X* \pm 1*	.XX	.XX*	.XXX	.XXX*	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.	SEE NOTE	SEE NOTE	SEE NOTE	Q'TY	DR: gan 2015/09/21	CHKD: gan 2015/09/21	APPD:	1:1	1/1	B	CUSTOMER DRAWING											
3	HOUSING	PBT+30%GF	1	UL94V-0	.X	.X* \pm 0.3	.XX	.XX* \pm 0.25	.XXX	.XXX* \pm 0.15	FINISH	SEE NOTE	TITLE:	USB AF 180* 双层焊线 (短体)													PART NO.:	USAF-08*N-1*S34									
2	SHELL	COPPER ALLOY	1	PLATED NICKEL	.X	.X* \pm 0.3	.XX	.XX* \pm 0.25	.XXX	.XXX* \pm 0.15	FINISH	SEE NOTE	DR:	gan 2015/09/21													CHKD:	gan 2015/09/21	APPD:	SCALE	1:1	SHEET	1/1	REV.	B	CUSTOMER	DRAWING
1	TERMINAL	COPPER ALLOY	8	PLATED GOLD/TIN	.X	.X* \pm 0.35	.XX	.XX* \pm 0.25	.XXX	.XXX* \pm 0.15	FINISH	SEE NOTE	Q'TY	DR:													gan 2015/09/21	CHKD:	gan 2015/09/21	APPD:	SCALE	1:1	SHEET	1/1	REV.	B	CUSTOMER
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</small>																																					