

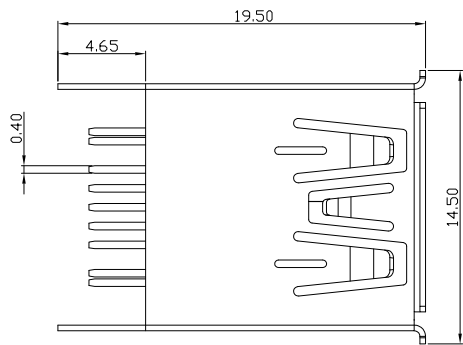
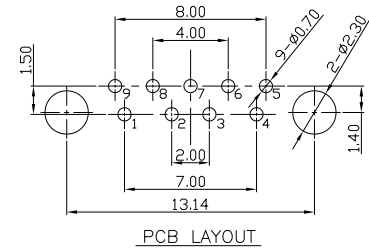
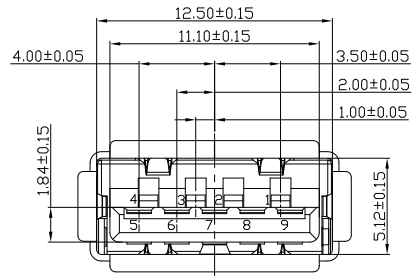
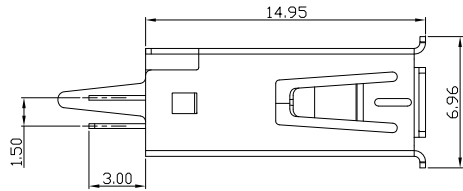




RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

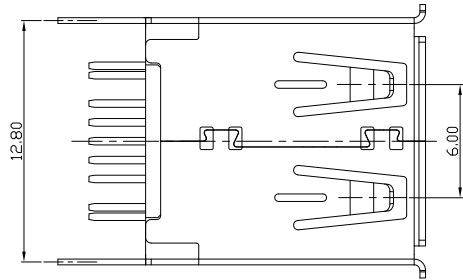

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING:1.5AMP;
- 2)INSULATION RESISTANCE: 1000MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 500V AC;
- 5)OPERATING TEMPERATURE:-40°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.

3.DIMENSIONS MARKED "▼"
TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-091N-1BLPU34-S

- 1:AU 1U"
- 5:AU 15U"
- 6:AU 30U"
- 1:PBT
- 2:PA6T
- 3:PA9T
- 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING				
5	COVER	PBT+30%GF	1	UL94V-0	.X	±0.38	.X*	±3°
4	HOUSING	PBT+30%GF	1	UL94V-0	.XX	±0.25	.X*	±3°
3	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	.XXX	±0.20	.XX*	±3°
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN				
1	SHELL	SPCC/COPPER ALLOY	1	PLATED NICKEL				
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			

雅安科技有限公司
ACCURATE INNOTECH INC.

TITLE: USB 3.0 AF 180度 DIP直脚 H14.95 卷边

PART NO: USAF-09XN-1BLPU34-S

DR: Ricky 2019/11/01

CHKD: Ricky 2019/11/01

APPD:

DWG NO: AII-PU34-S

SCALE: 1:1 SHEET: 1/1 REV: B CUSTOMER DRAWING

