

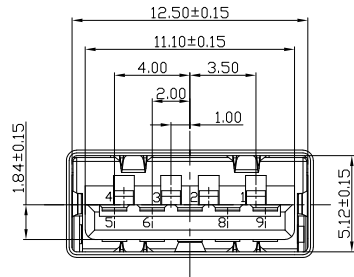
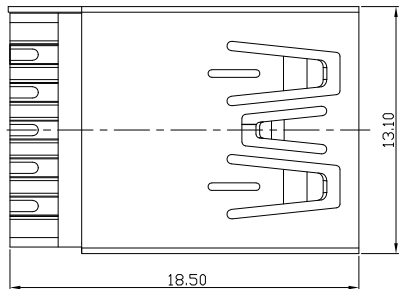


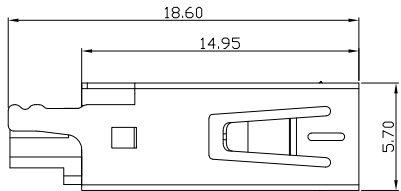

RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

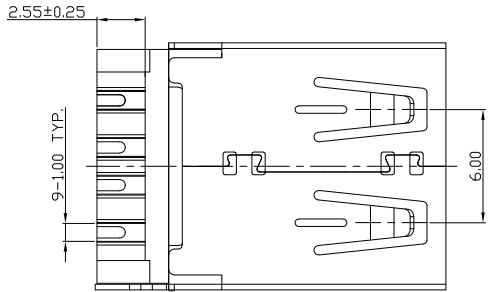

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

NOTES:

1.ELECTRICAL:

- 1)VOLTAGE CURRENT RATING:1.5AMP;
- 2)INSULATION RESISTANCE: 1000MΩ MIN;
- 3)CONTACT RESISTANCE: 30mΩ MAX;
- 4)WITHSTANDING VOLTAGE: 500V AC;
- 5)OPERATING TEMPERATURE:-40°C TO +85°C.

2.Mechanical:

- 1)Mating Force: 35N MAX
- 2)Unmating Force: 10N MIN.

3.DIMENSIONS MARKED "▼"

TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-091N-1BLSU35

1:Au 1U*
5:Au 15U*
6:Au 30U*

W:WHITE
B:BLACK
BL:BLUE

1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
4	HOUSING	PBT+30%GF	1	UL94V-0	.X ±0.38	.X* ±3°	SEE NOTE	TITLE: USB 3.0 AF 焊線180度 普通款 无翻边		PART NO: USAF-09XN-1BLSU35	
3	TERMINAL(5P)	COPPER ALLOY	5	PLATED GOLD/TIN	.XX ±0.25	.X* ±3°		DR: Ricky 2019/11/05		DWG NO: AII-SU35	
2	TERMINAL(4P)	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.20	.XX* ±3°		CHKD: Ricky 2019/11/05		SCALE SHEET REV. CUSTOMER 1:1 1/1 B DRAWING	
1	SHELL	SPCC/COPPER ALLOY	1	PLATED NICKEL	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD:			