







RoHS  
Compliant  
2002/95/EC

Halogen Free


REV.	ECN.	NO.	APPD.

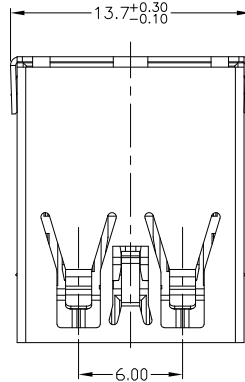

PIN NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
5	STDA_SSRX-
6	STDA_SSRX+
7	GND_DRAIN
8	STDA_SSTX-
9	STDA_SSTX+
Shell	Shield

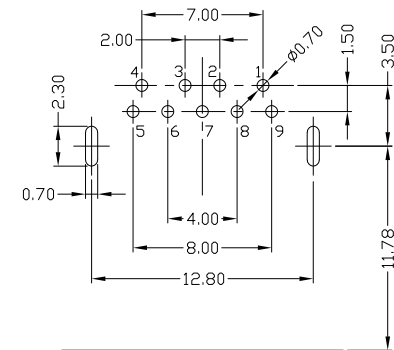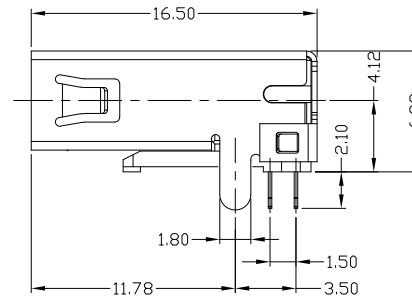

RECOMMENDED PCB LAYOUT

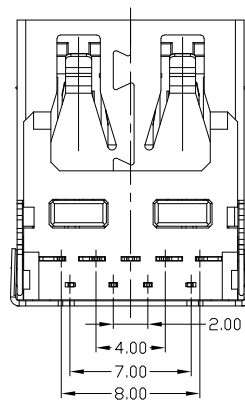

NOTES:

- ELECTRICAL:
  - CURRENT RATING:1.5AMP;
  - INSULATION RESISTANCE: 100MΩ MIN;
  - CONTACT RESISTANCE: 30mΩ MAX;
  - WITHSTANDING VOLTAGE: 100V AC;
  - OPERATING TEMPERATURE:-40°C ~ +85°C.
- Mechanical:
  - Mating Force: 35N MAX
  - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAF-09\*N-4BLRC118

1Au 1U"  
5Au 15U"  
6Au 30U"

W:WHITE  
B:BLACK  
BL:BLUE  
1PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.					
3	SHELL	COPPER ALLOY	1	PLATED NICKEL	X. ±0.35	X.' ±2'	SEE NOTE	TITLE: USB 3.0 AF DIP 90度 反向 直脚 无卷边		PART NO.: USAF-09*N-4BLRC118		
2	TERMINAL	COPPER ALLOY	9	PLATED GOLD/TIN	.X ±0.3	.X' ±1'		SEE NOTE	DR: gan 2016/08/30		DWG NO.: AII-RC118	
1	HOUSING	LCP+30%GF	1	UL94V-0	.XX ±0.25	.XX'			CHKD: gan 2016/08/30	SCALE		SHEET
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.		Q'TY	APPD:	1:1	1/1	B	DRAWING