



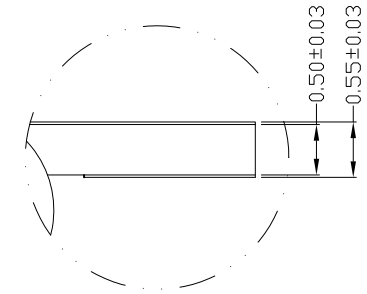




RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

Pin NUMBER	SIGNAL NAME
1	VBUS
2	D-
3	D+
4	GND
Shell	Shield

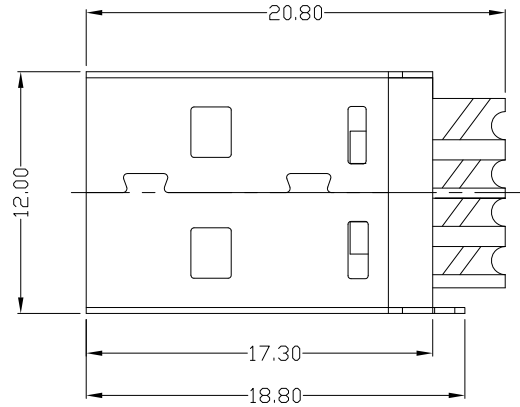

DETAIL A
SCALE 5:1

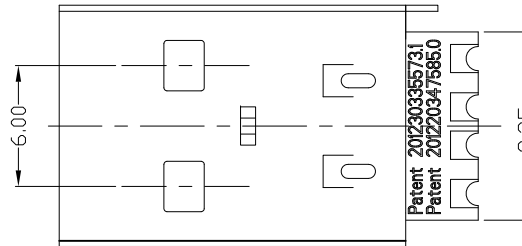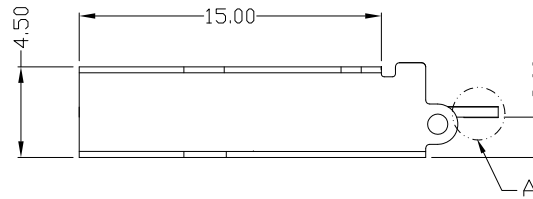

NOTES:

1. ELECTRICAL:

- VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- INSULATION RESISTANCE: 1000MΩ MIN;
- CONTACT RESISTANCE: 30mΩ MAX;
- WITHSTANDING VOLTAGE: 500V AC;
- OPERATING TEMPERATURE: -55°C TO +85°C.


2. Mechanical:

- Mating Force: 35N MAX
- Unmating Force: 10N MIN.

3. NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-04*N-1*SC10



Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.				
3	SHELL	SPCC	1	PLATED NICKEL	X. ±0.35	X.' ±2'	TITLE:	PART NO.:			
2	HOUSING	PCB+PBT(30%GF)	1	UL94V-0	.X ±0.3	.X' ±1'	USB 2.0 AM 焊线短体 双面插	USAM-04*N-1*SC10			
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XX ±0.25	.XX'	DR: gan 2017/1/13	DWG NO.:			
					.XXX ±0.15	.XXX'	CHKD: gan 2017/1/13	AII-SC10			
							APPD:	SCALE	SHEET	REV.	CUSTOMER
								1:1	1/1	B	DRAWING

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

