
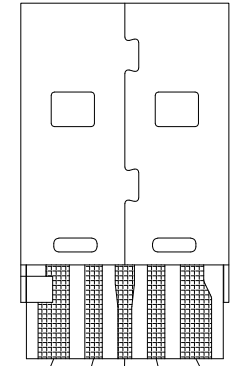

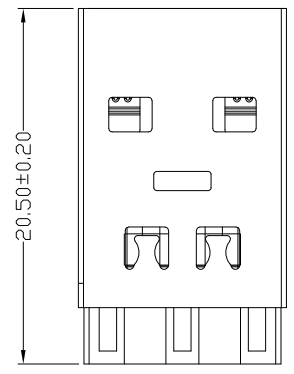




RoHS Compliant
 2002/95/EC
 Process Capable

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

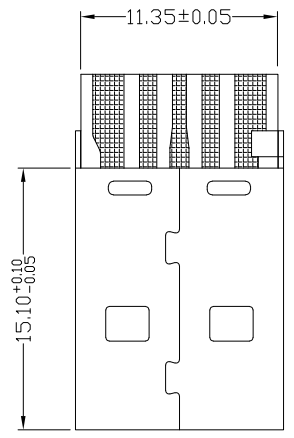

G D+ ID D- V
 黑 绿 蓝 白 红

NOTES:
 1.ELECTRICAL:
 1)>VOLTAGE CURRENT RATING: 3AMP,30V AC;
 2)>INSULATION RESISTANCE: 1000MΩ MIN;
 3)>CONTACT RESISTANCE: 30mΩ MAX;
 4)>WITHSTANDING VOLTAGE: 100V AC;
 5)>OPERATING TEMPERATURE: -30°C TO +85°C.
 2.MECHANICAL:
 1)>MATING FORCE: 35N MAX.
 2)>UNMATING FORCE: 10N MIN.
 3.DIMENSIONS MARKED "▼"
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
 USAM-041N-1PSD05
 1Au 1U*
 6Au 30U*
 W:WHITE
 B:BLACK
 P:PURPLE
 G:GREEN
 D:DRANGE
 1:PBT
 2:PA6T
 3:PA9T
 4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.									
3	SHELL	SPCC	1	PLATED NICKEL	X	±0.25	X'	±3'	MAT'L	TITLE: USB AM 短体埋线式 接地线大电 流五芯全兼容款 L=20.5mm		PART NO.: USAM-04XN-1XSD05				
2	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.X	±0.20	.X'	±2'	SEE NOTE	DR: Ricky 2025/03/08		DWG NO.: AII-SD05				
1	HOUSING	PBT+30%GF	1	UL94V-0	.XX	±0.15	.XX'	±1'	FINISH	CHKD: Ricky 2025/03/08		SCALE	SHEET	REV.	CUSTOMER	
					.XXX	±0.08			SEE NOTE	APPD:		1:1	1/1	B	DRAWING	
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC				Q'TY							