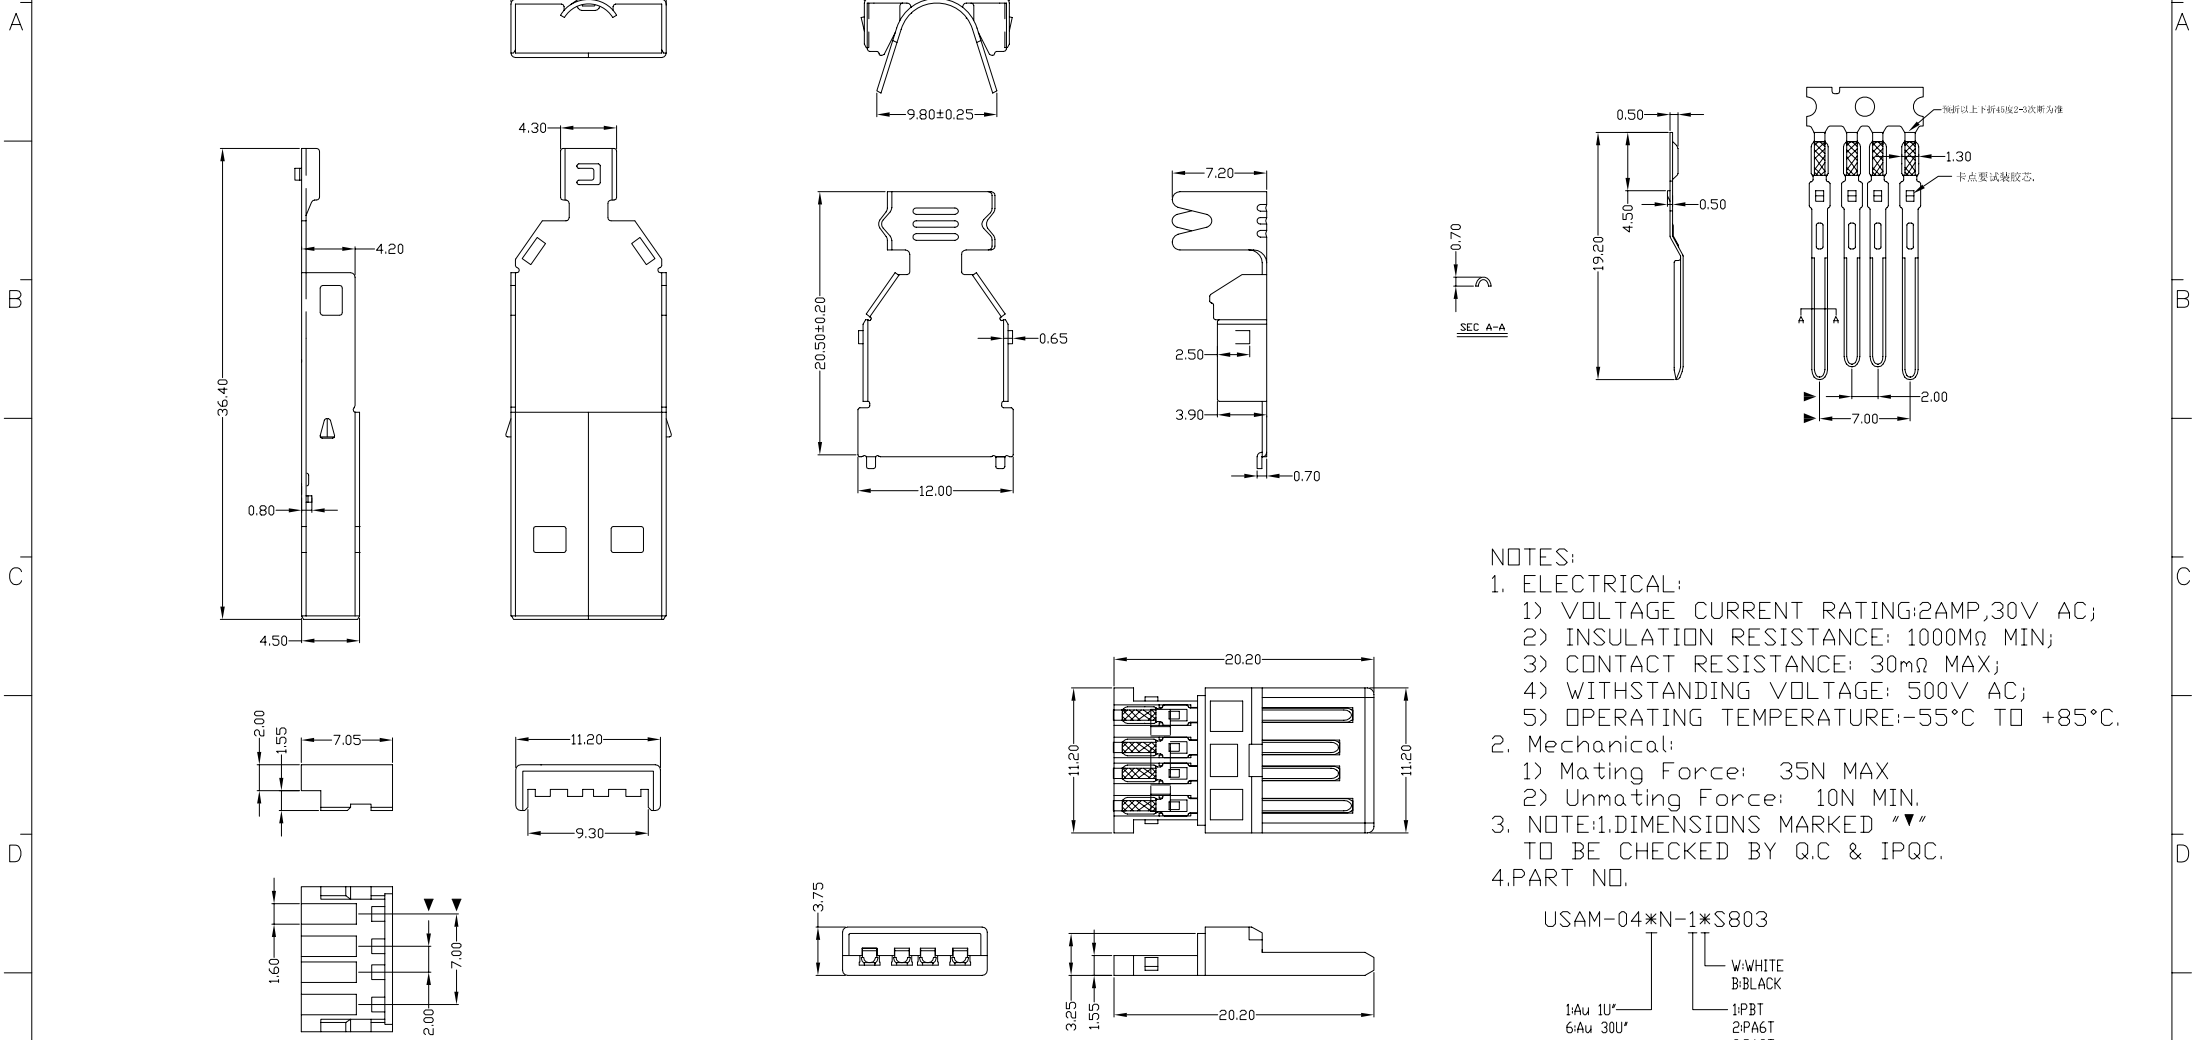

RoHS Compliant
 2002/95/EC
 Process Capable

REV	LTR	DESCRIPTION	DATE	REVISER	APPD




- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.
 - PART NO.

USAM-04*N-1*S803

- W: WHITE
- B: BLACK
- 1: PBT
- 2: PA6T
- 3: PA9T
- 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING											
4	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.' ±2*	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC. TITLE: USB A/M 长体直线型弧端大线夹 (四件套) PART NO.: USAM-04*N-1*S803 DR: gan 2012/7/04 DWG NO.: AII-S803 CHKD: gan 2012/7/04 APPD:						
3	UP SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X' ±1*	MAT'L	SEE NOTE							
2	DOWN SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	SEE NOTE							
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE							
NO	PARTS	MATERIAL	QTY	FINISHING	<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.</small>				SCALE	SHEET	REV.	CUSTOMER DRAWING			