




RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

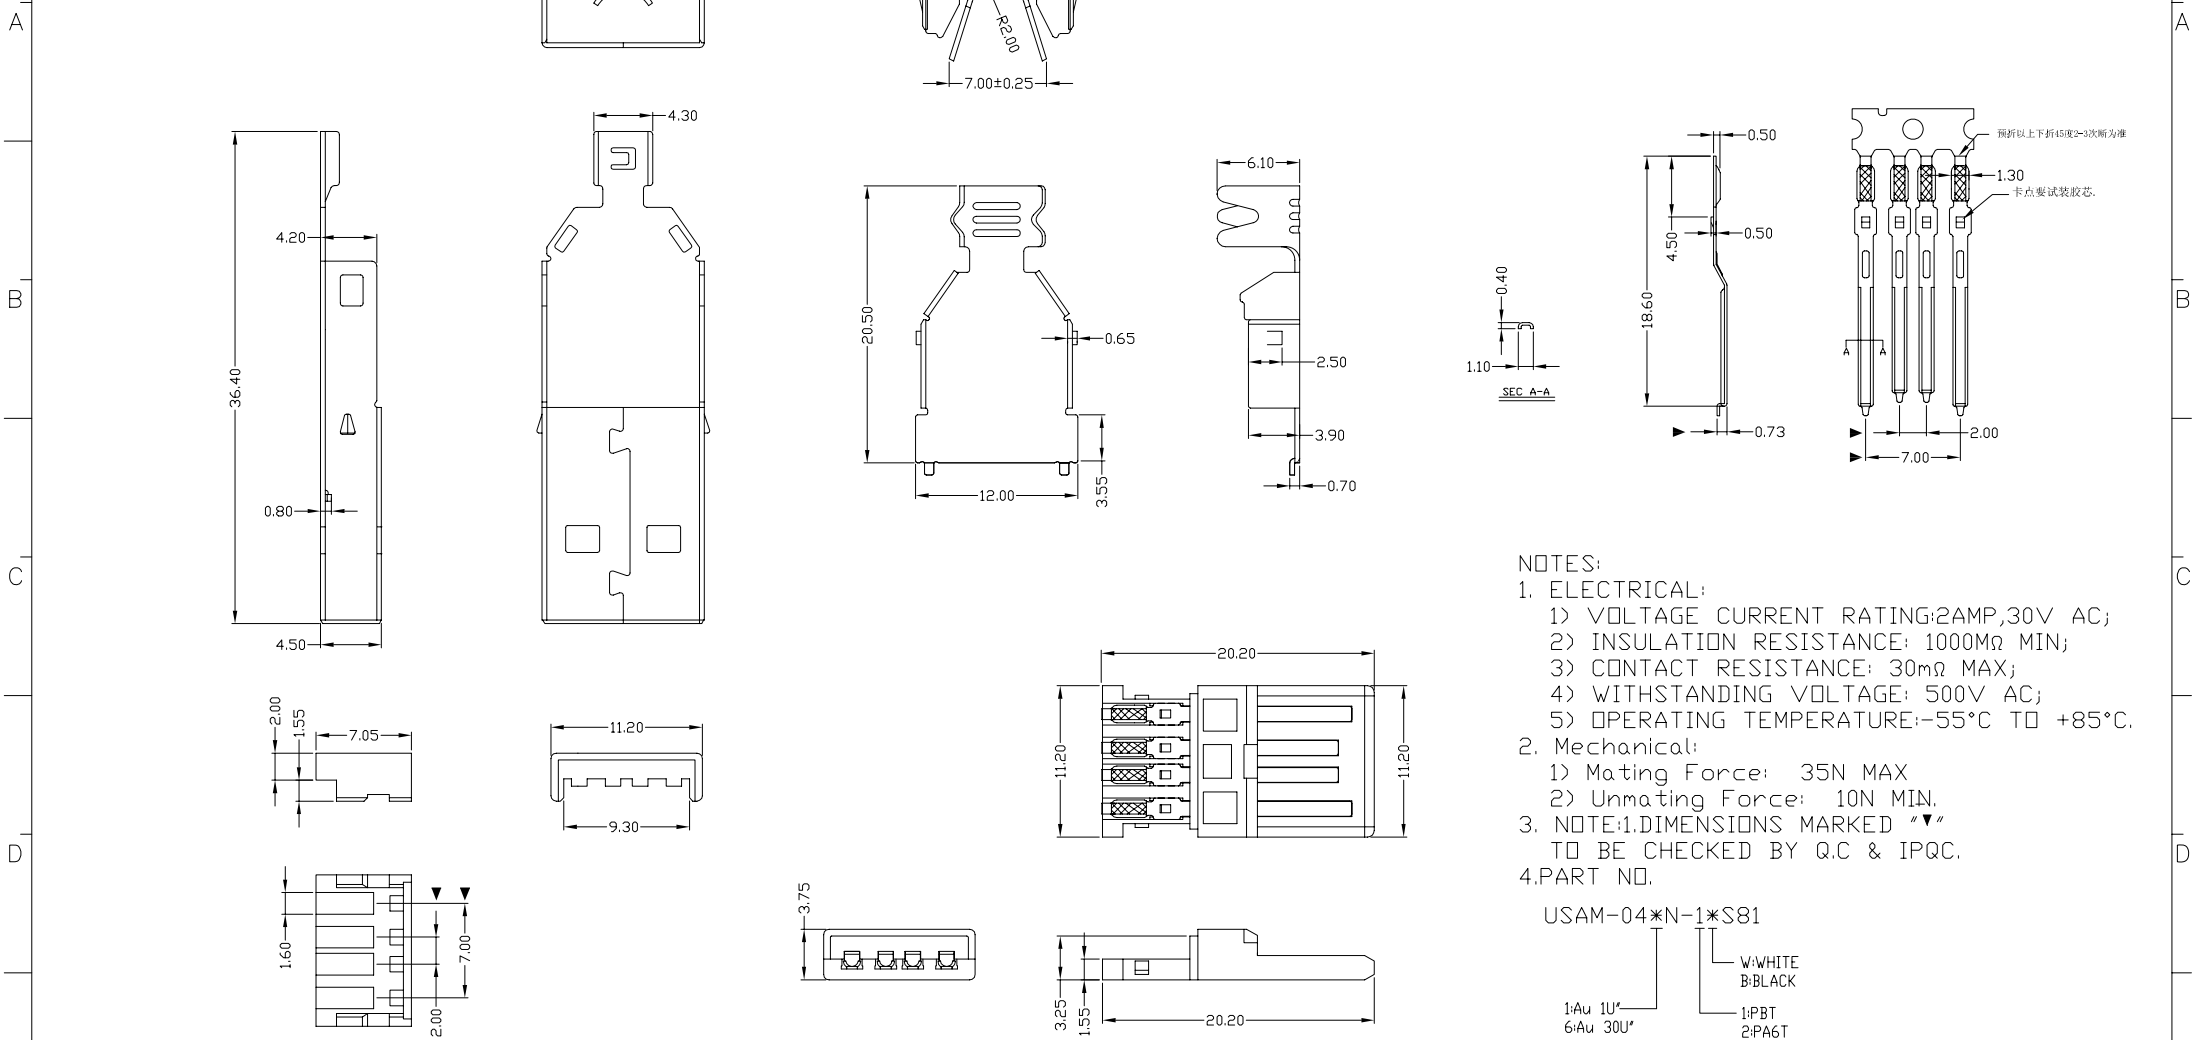

NOTES:
 1. ELECTRICAL:
 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 2) INSULATION RESISTANCE: 1000MΩ MIN;
 3) CONTACT RESISTANCE: 30mΩ MAX;
 4) WITHSTANDING VOLTAGE: 500V AC;
 5) OPERATING TEMPERATURE: -55°C TO +85°C.
 2. Mechanical:
 1) Mating Force: 35N MAX
 2) Unmating Force: 10N MIN.
 3. NOTE: 1. DIMENSIONS MARKED "▼"
 TO BE CHECKED BY Q.C & IPQC.
 4. PART NO.

USAM-04*N-1*S81
 W-WHITE
 B-BLACK
 1: Au 1U*
 6: Au 30U*
 1: PBT
 2: PA6T
 3: PA9T
 4: LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	TITLE	PART NO.:	SCALE	SHEET	REV.	CUSTOMER DRAWING
4	HOUSING	PBT	1	UL94V-0	X. ±0.35	X.* ±2*	雅安科技有限公司	USAM-04*N-1*S81	1:1	1/1	B	DRAWING
3	UP SHELL	SPCC	1	PLATED NICKEL	.X ±0.3	.X* ±1*	ACCURATE INNOTECH INC.					
2	DOWN SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	USB A/M 长体蝴蝶扣平端小线夹 (四件套)	USAM-04*N-1*S81				
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.15	.XXX*	DR: gan 2012/7/04	AII-S81				
							CHKD: gan 2012/7/04					

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.

