




RoHS
Compliant
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

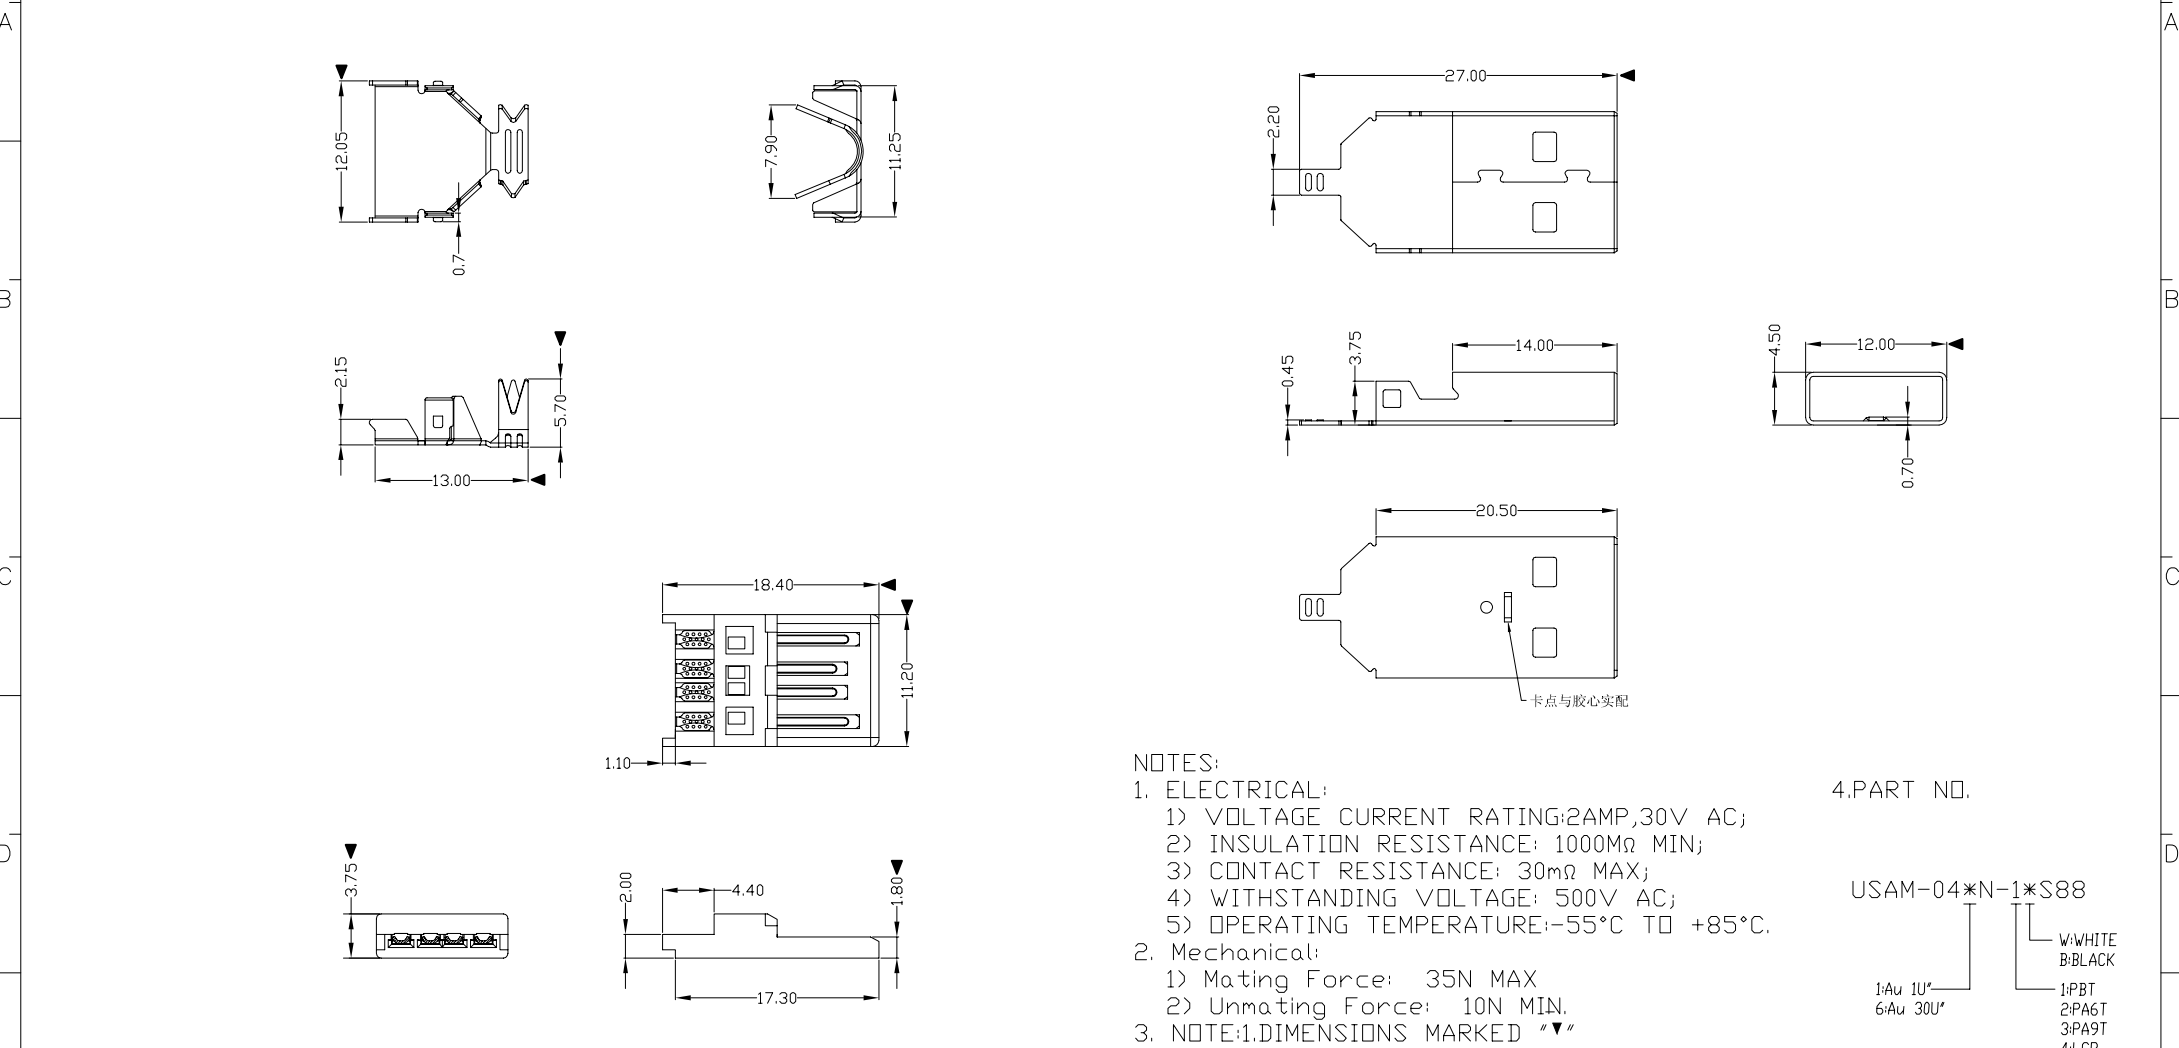

- NOTES:
- ELECTRICAL:
 - VOLTAGE CURRENT RATING: 2AMP, 30V AC;
 - INSULATION RESISTANCE: 1000MΩ MIN;
 - CONTACT RESISTANCE: 30mΩ MAX;
 - WITHSTANDING VOLTAGE: 500V AC;
 - OPERATING TEMPERATURE: -55°C TO +85°C.
 - Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
 - NOTE: 1. DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
USAM-04*N-1*S88

1: Au 1U*
6: Au 30U*

W: WHITE
B: BLACK

1: PBT
2: PA6T
3: PA9T
4: LPC

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	X. ±0.35	X.* ±2*	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.							
4	HOUSING	PBT	1	UL94V-0	.X ±0.3	.X* ±1*	MAT'L	SEE NOTE	TITLE:	USB A/M 短体(三件套)			PART NO.:	USAM-04*N-1*S88		
3	UP SHELL	SPCC	1	PLATED NICKEL	.XX ±0.25	.XX*	FINISH	SEE NOTE	DR:	gan 2012/7/04			DWG NO.:	AII-S88		
2	DOWN SHELL	SPCC	1	PLATED NICKEL	.XXX ±0.15	.XXX*	Q'TY	SEE NOTE	CHKD:	gan 2012/7/04			SCALE	SHEET	REV.	CUSTOMER
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			APPD:	1:1	1/1	B	DRAWING				