

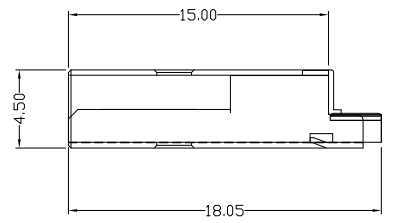

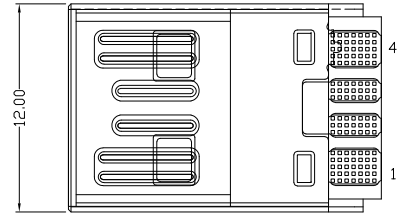



RoHS Compliant
 2002/95/EC
 Process Capable

REV	LTR	DESCRIPTION	DATE	REVISER	APPD



NOTES:
 1.ELECTRICAL:
 1)>VOLTAGE CURRENT RATING: 3&5AMP,30V AC;
 2)>INSULATION RESISTANCE: 100MΩ MIN;
 3)>CONTACT RESISTANCE: 30mΩ MAX;
 4)>WITHSTANDING VOLTAGE: 500V AC;
 5)>OPERATING TEMPERATURE: -55°C TO +85°C.
 2.Mechanical:
 1)>Mating Force: 35N MAX
 2)>Unmating Force: 10N MIN.
 3.DIMENSIONS MARKED "▼"
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.
 USAM-041N-1WSD00-*

1Au 1U*
 6Au 30U*

W:WHITE
 P:PURPLE

T2=3A
 T72=5A

1-PBT
 2-PA6T
 3-PA9T
 4-LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	.X	±0.15	.X'	±1'	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC. TITLE: USB AM 短体焊线式 大电流 PART NO.: USAM-04XN-1XSD00 DR: <i>Ricky</i> 2019/11/05 CHKD: <i>Ricky</i> 2019/11/05 APPD:				
					.XX	±0.05	.XX'		MAT'L	SEE NOTE					FINISH
3	HOUSING	LCP+30%GF	1	UL94V-0								1:1	1/1	B	
2	SHELL	SPCC	1	PLATED NICKEL											
1	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN											
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC					