





RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

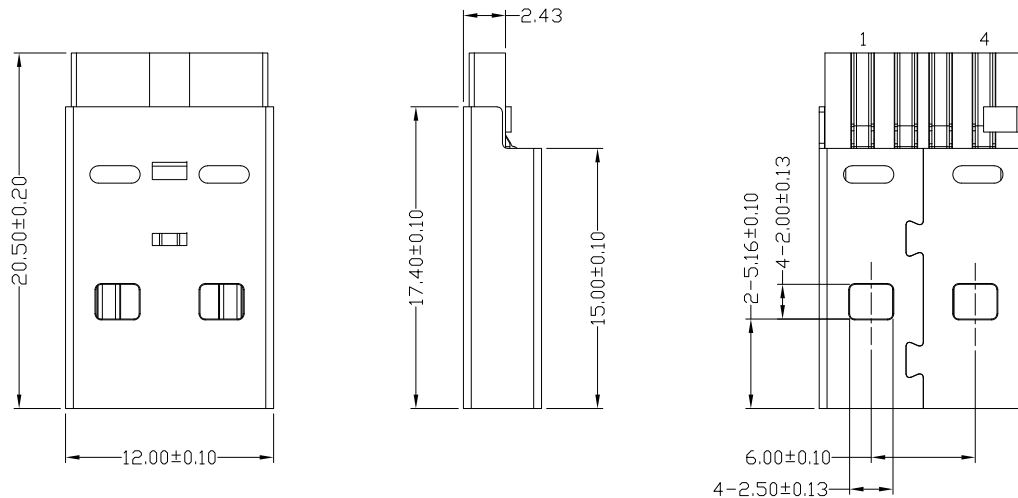

NOTES:

1.ELECTRICAL:

- 1) VOLTAGE CURRENT RATING: 2AMP, 30V AC;
- 2) INSULATION RESISTANCE: 100MΩ MIN;
- 3) CONTACT RESISTANCE: 30mΩ MAX;
- 4) WITHSTANDING VOLTAGE: 250V AC;
- 5) OPERATING TEMPERATURE: -30°C TO +85°C.

2.MECHANICAL:

- 1) MATING FORCE: 35N MAX.
- 2) UNMATING FORCE: 10N MIN.

3.DIMENSIONS MARKED "▼"

TO BE CHECKED BY Q.C & IPQC.

4. PART NO.

USAM-041N-1WSD02

1Au 1U\*  
6Au 30U\*

W:WHITE  
B:BLACK  
P:PURPLE  
G:GREEN  
D:DRANGE

1:PBT  
2:PA6T  
3:PA9T  
4:LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING	UNITS	mm	雅安科技有限公司 ACCURATE INNOTECH INC.								
3	SHELL	SPCC	1	PLATED NICKEL	X	$\pm 0.25$	X'	$\pm 3'$	MAT'L	TITLE: USB AM 短体埋线式 防裂口外壳 短路右向 L=20.5mm		PART NO.: USAM-04XN-1XSD02			
2	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.X	$\pm 0.20$	.X'	$\pm 2'$	SEE NOTE	DR: Ricky 2025/03/08		DWG NO.: AII-SD02			
1	HOUSING	PBT+30%GF	1	UL94V-0	.XX	$\pm 0.15$	.XX'	$\pm 1'$	FINISH	CHKD: Ricky 2025/03/08		SCALE	SHEET	REV.	CUSTOMER
					.XXX	$\pm 0.08$			SEE NOTE	APPD:		1:1	1/1	B	DRAWING
					THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC.			Q'TY							