




RoHS  
Compliant  
2002/95/EC

REV	LTR	DESCRIPTION	DATE	REVISER	APPD

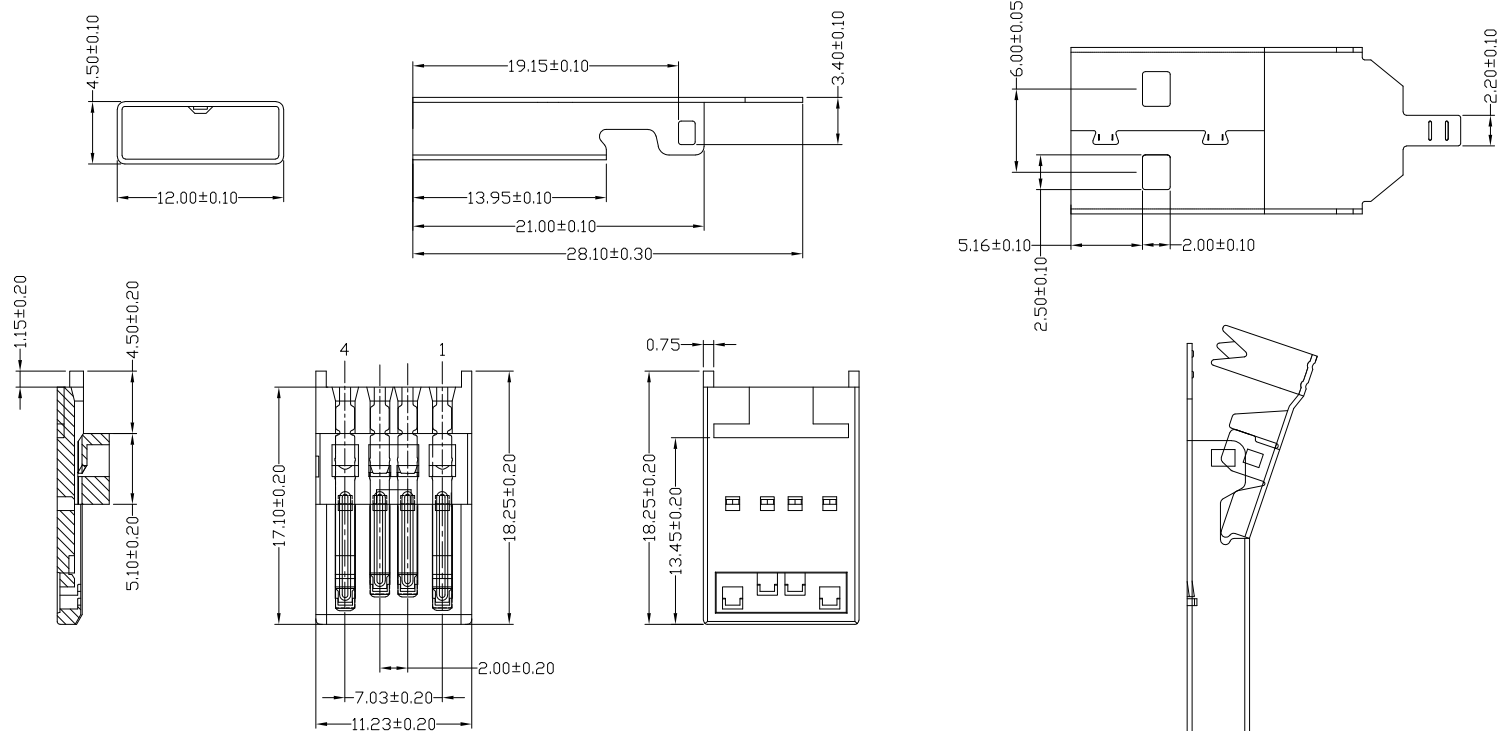

NOTES:  
 1.ELECTRICAL:  
 1)>VOLTAGE CURRENT RATING: 2AMP,30V AC;  
 2)>INSULATION RESISTANCE: 1000MΩ MIN;  
 3)>CONTACT RESISTANCE: 30mΩ MAX;  
 4)>WITHSTANDING VOLTAGE: 100V AC;  
 5)>OPERATING TEMPERATURE: -30°C TO +85°C.  
 2.MECHANICAL:  
 1)>MATING FORCE: 35N MAX.  
 2)>UNMATING FORCE: 10N MIN.  
 3.DIMENSIONS MARKED "▼"  
 TO BE CHECKED BY Q.C & IPQC.

4. PART NO.  
 USAM-041N-1WSU53

1Au 1U\*  
 6Au 30U\*

W:WHITE  
 B:BLACK

1-PBT  
 2-PA6T  
 3-PA9T  
 4-LCP

Bill of materials:

NO	PARTS	MATERIAL	QTY	FINISHING			
4	UP SHELL	SPCC	1	PLATED NICKEL	.X ±0.30	.X* ±5*	UNITS mm
3	DOWN SHELL	SPCC	1	PLATED NICKEL	.XX ±0.20	.XX* ±2*	MAT'L
2	TERMINAL	COPPER ALLOY	4	PLATED GOLD/TIN	.XXX ±0.10		SEE NOTE
1	HOUSING	PBT+30%GF	1				FINISH
							SEE NOTE
							Q'TY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC

雅安科技有限公司 ACCURATE INNOTECH INC.			
TITLE: USB AM 短体焊线式 三件套 L=28mm		PART NO.: USAM-04XN-1XSU53	
DR: Ricky 2025/03/12		DWG NO.: AII-SU53	
CHKD: Ricky 2025/03/12		SCALE	SHEET
APPD:		1:1	1/1
		REV.	CUSTOMER DRAWING
		B	